XLERATOR RECESS KIT INSTALLATION


STOCK # 40505

FOR PROPER ELECTRICAL CONNECTIONS, CHECK YOUR LOCAL BUILDING CODES. YOUR UNIT WIRING MUST BE INSTALLED BY A QUALIFIED, LICENSED ELECTRICIAN. SEE DRYER INSTALLATION INSTRUCTIONS FOR WIRING INFORMATION.

INSTALLATION NOTE: After unpacking, remove and save the bolts holding the dryer mounting plate to the wall box.

SUGGESTED DRYER MOUNTING HEIGHTS FROM FLOOR TO BOTTOM OF DRYER

Men's	45" (114 cm)
Women's	43" (109 cm)
Teenager's	41" (104 cm)
Small Children	35" (89 cm)
Accessible	37" (94 cm)

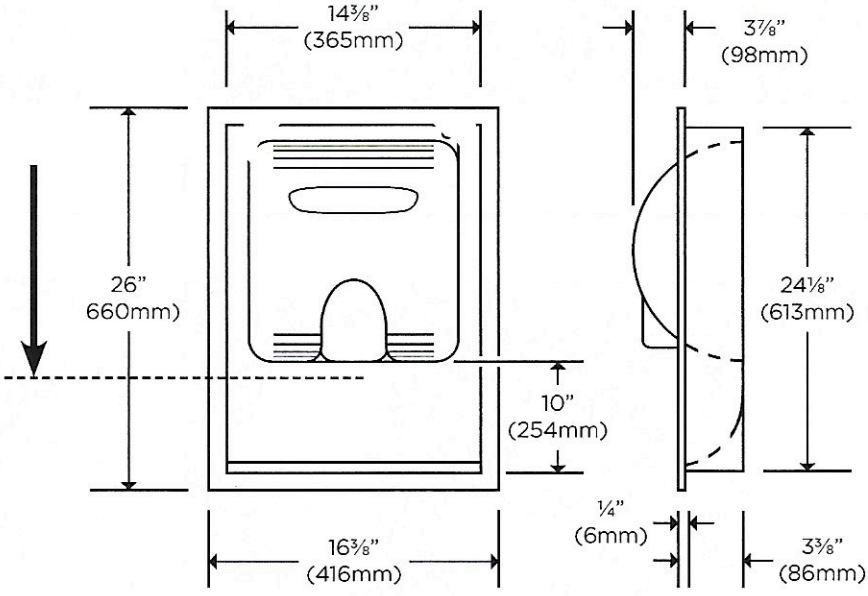

CONSTRUCTION

Wall box is fabricated of 22 GA 18-8 type 304 stainless steel with #4 satin finish. All welded construction.

OVERALL DIMENSIONS

16 3/8" wide x 26" high x 3 3/8" deep
(416 mm wide x 660 mm high x 86 mm deep)

ROUGH WALL OPENING

14 1/2" wide x 24 3/8" high x 4" deep
(368 mm wide x 619 mm high x 102 mm deep)

NOTE: Not recommended for an existing single block wall.

PARTS

Model 40505:

632 Wrench

4 Mounting Nuts & 4 Screws

INSTALLATION GUIDE (CONSULT LOCAL ADA CODES)


When installed, the bottom of the XLERATOR Hand Dryer will be 10" (254 mm) above the bottom of the rough wall opening. Therefore, the bottom of the rough wall opening should be 10" (254 mm) below the suggested mounting height for the hand dryer (refer to suggested dryer mounting heights chart above).

STEP 1



Cut and frame the rough wall opening - 14.5" W x 24 3/8" H

STEP 2

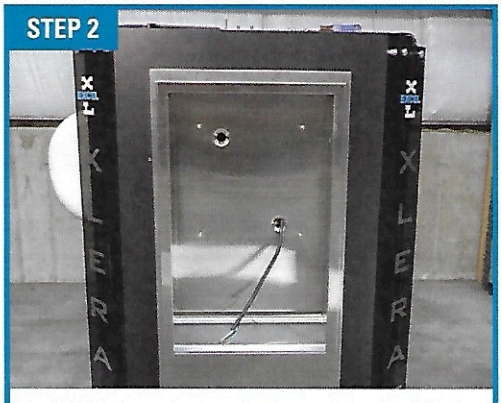


Bring electrical service and ground wire to available location. Install wall box with the flange on a finished wall using the 4-SS screws supplied.

STEP 3




For best fit, use a 90-degree fitting to connect the electrical service to one of the two available locations on the back of the wall box. Picture shown for information purposes, may not be accurate to #40505 product.

STEP 4A

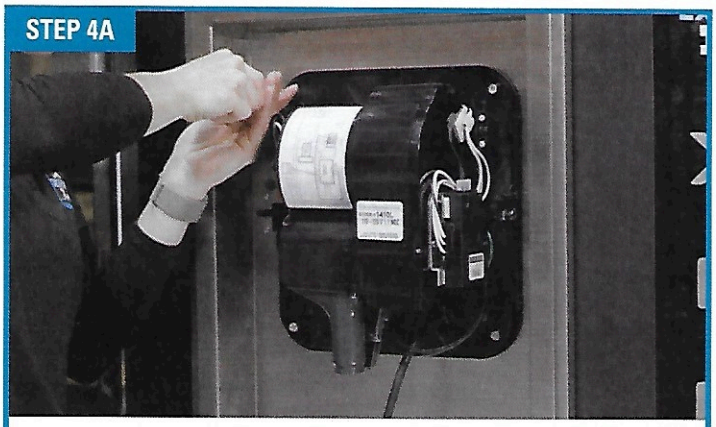


Knock out the appropriate electrical inlet on dryer wall plate and install dryer internal components onto dryer mounting plate using all 4 mounting nuts.

STEP 4B

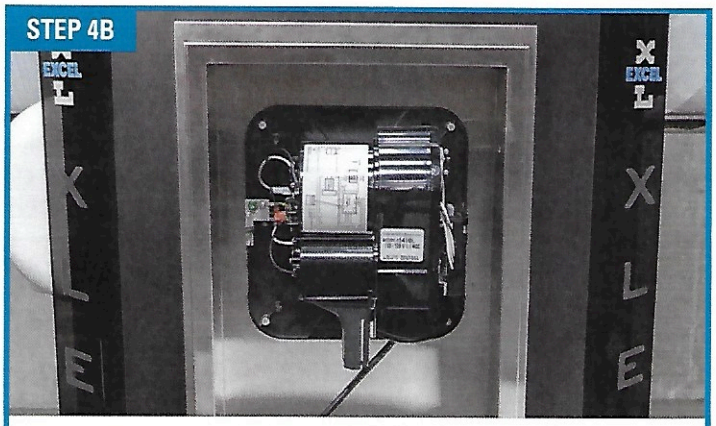


Knock out the appropriate electrical inlet on dryer wall plate and install dryer internal components onto dryer mounting plate using all 4 mounting nuts.

STEP 5

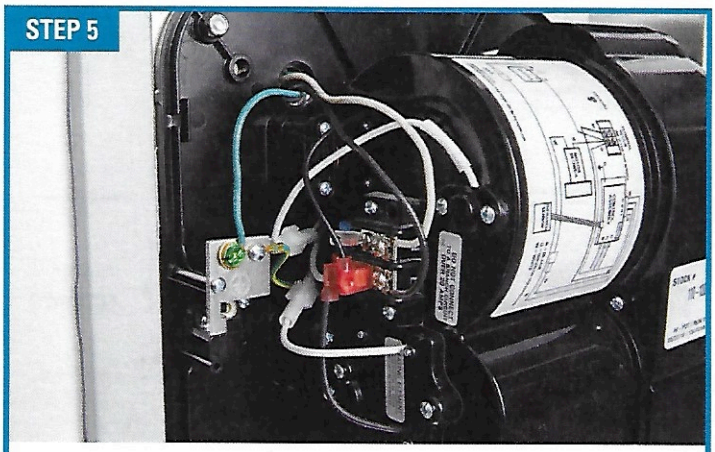

Connect electrical service to the terminal block of hand dryer. Properly ground the dryer via the supplied ground screw.

STEP 6

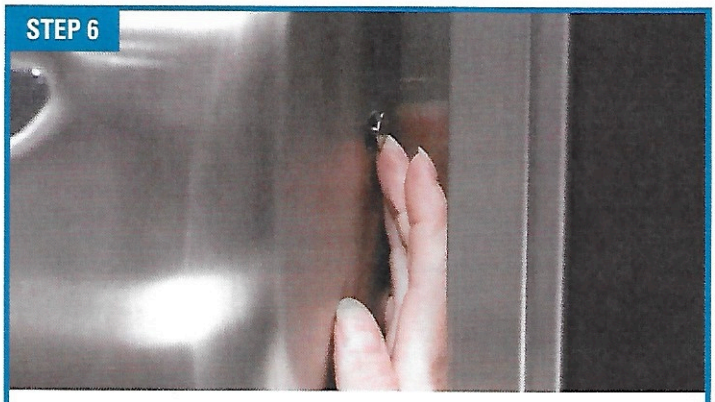


We recommend using your hand to tighten each bolt on the sides of the dryer first, then tighten with the wrench. Access is easier with the wrench extension (Part #632) used to elongate wrench (Part #630).

STEP 7



Install the dryer cover with 2 flat head tamper-proof bolts using the special wrench provided.

STEP 8

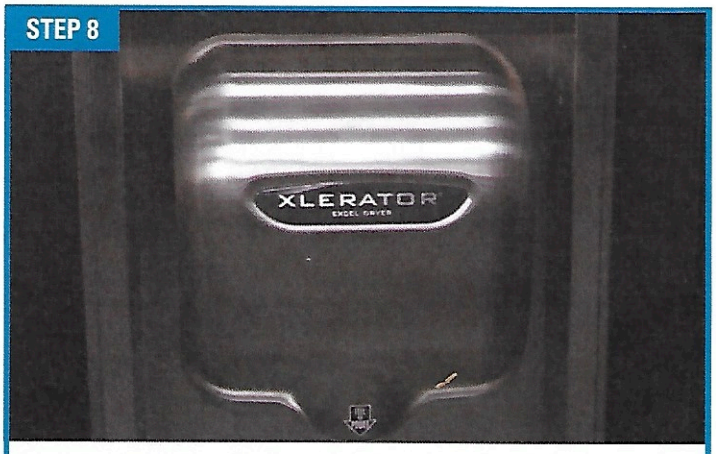

Remove protective film from Wall Box. Turn on the power and test for proper operation.