

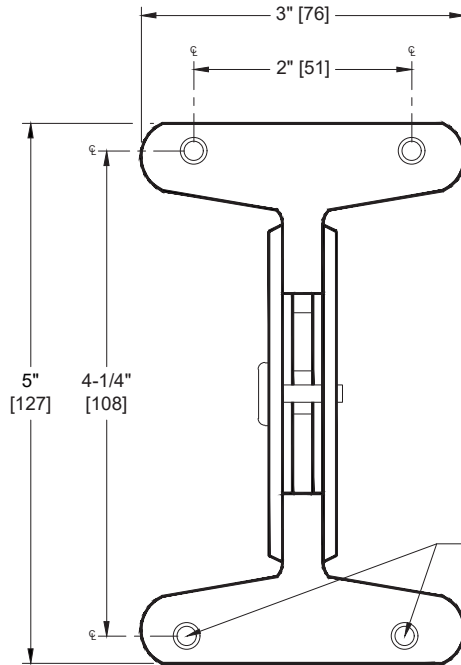
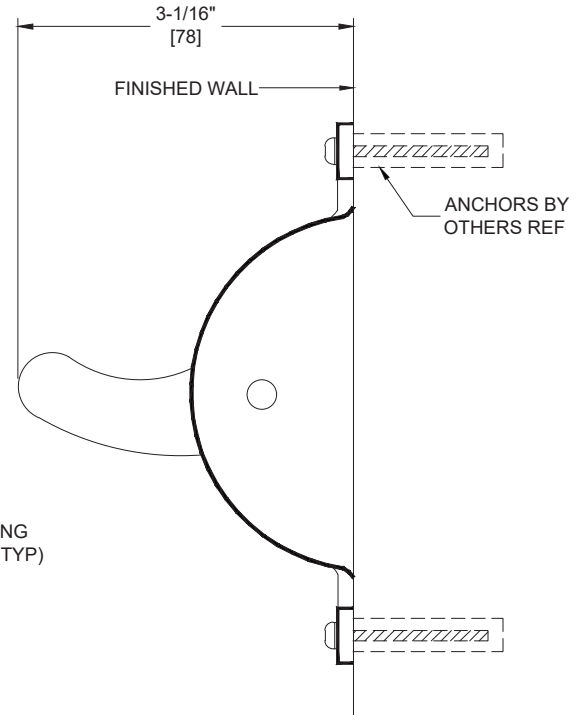

American Specialties, Inc.
Model #120
Technical Data Sheet
Clothes Hook – Front Mount
Security Accessories
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)


 MOUNTING
HOLES (TYP)

NOTE:

 ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Bracket 11 gauge, hook 7 gauge type 304 stainless steel with satin finish. If hook is excessively loaded, it will snap down for safety. Unit has four (4) holes through flange for front mounting.

KEY FEATURES & SPECIFICATIONS

- Built for high security environments
- 1/4-20 button head pinTorx® machine screws supplied.
- Type 304 Stainless Steel - Satin Finish
- 7 gauge hook
- Front Mount
- Anti-Ligature Snap Down Hook
- 11 gauge wall plate

**American Specialties, Inc.****Model #120****Technical Data Sheet****OPERATION & MAINTENANCE**

Clothes hook will release down when overloaded beyond the 35 lb (16 kg) limit. Hook tension may be adjusted to maintain trip threshold over the life of the product.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	3" [76] W x 5" [127] H x 3-1/16" [78] D
Construction	Type 304 Stainless Steel - Satin Finish 7 gauge Anti-Ligature Snap Down Hook
Mounting	Front Mount
Capacity	

INSTALLATION

Unit is front mounted to wall or partition using four (4) 1/4-20 x 2" (M6x50) button head pin-Torx® machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). Anchors to be supplied by installer to suit wall condition. For compliance with 2010 ADA Accessibility Standards, install unit so the top of the hook is 48" [1219] maximum Above Finished Floor (AFF).

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice