

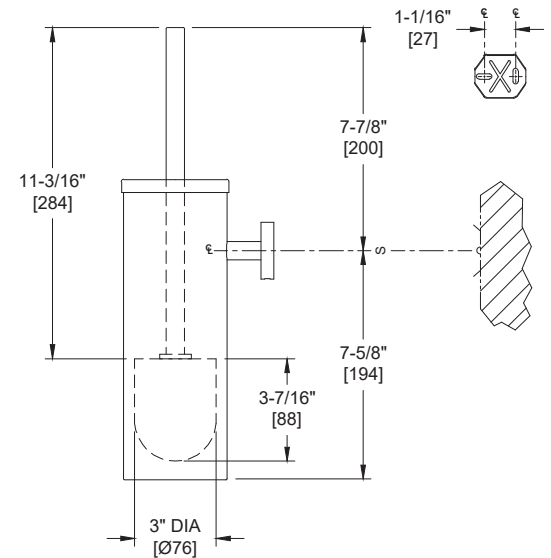

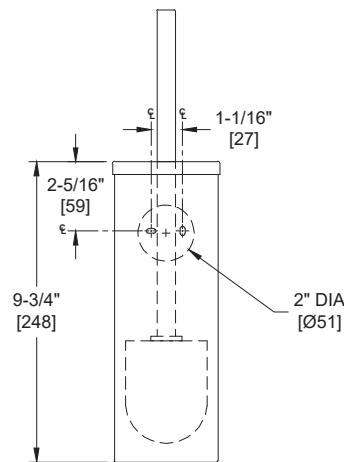


American Specialties, Inc.
Model #7387
Technical Data Sheet
Toilet Brush & Holder – Wall Mounted
Hospitality Accessories
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)



NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Tube handle, round splash guard and storage cylinder of this wall-mounted unit are fabricated of 22 gauge satin-finish stainless steel. Includes a drip cup at the bottom for easy cleaning. Brush is made of PVC with a polypropylene shaft. 15-1/2" [394] from bottom of base to top of handle and extends 5-1/8" [130] from wall. Allows for easy cleaning while maintaining an elegant washroom.

KEY FEATURES & SPECIFICATIONS

- Brush handle has built in splash guard
- Includes a drip cup
- Type 304 Stainless Steel - Satin Finish
- Wall Mounted

**American Specialties, Inc.****Model #7387****Technical Data Sheet****OPERATION & MAINTENANCE**

Brush is removed manually from storage cylinder and used in facilities to cleanse surface debris, rinsed and returned to storage. Periodic cleaning of internal drip cup and brush should be performed to maintain sanitary conditions on a cycle determined by maintenance needs.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	3-5/8" Dia. [Ø92] x 15-1/2" [361] H
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Wall Mounted
Capacity	One (1) Brush

INSTALLATION

Install surface mounted unit in location convenient for janitorial access on finished wall with two (2) M4x39 (#6x1-1/2") pan head self-tapping screws (provided) into plastic wall anchors (provided) or other suitably prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions in mounting holes pattern shown on diagram. Unit requires 12" [305] vertical clearance above holder body for brush withdrawal and return to storage after service. For compliance with 2010 ADA Accessibility Standards install unit so that top of handle is 48" [1219] maximum Above Finished Floor (AFF). Recommended mounting height is 32" [813] AFF. Hex L-key [M2.5] is provided to lock set screw to secure unit to wall bracket.

WARRANTY

One (1) Year from date of Invoice