



American Specialties, Inc.

Model #0361

Technical Data Sheet


Automatic Liquid Soap & Gel Hand Sanitizer Dispenser – 28 oz. – Plastic – Surface Mounted

Soap Dispensers

MasterFormat Section 10 28 13

Scan for
Information

SUSTAINABILITY/LEED

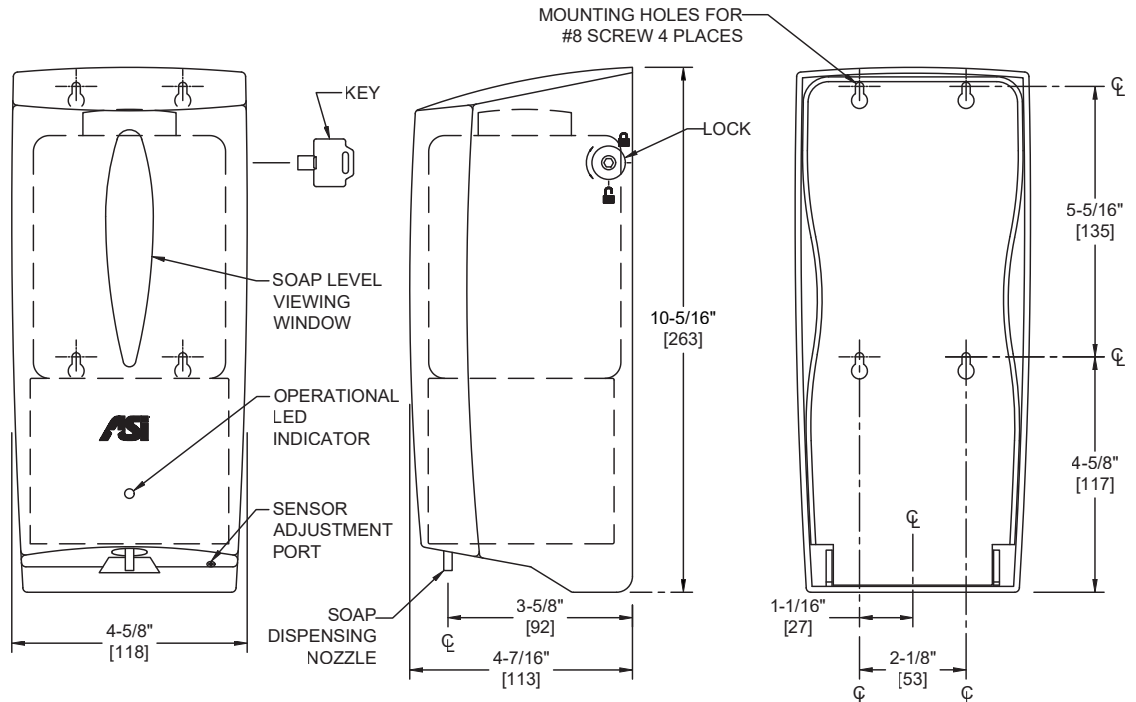

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE
DOCUMENT ONLINE FOR CLEANING

PRODUCT OVERVIEW

White, high-impact plastic, proximity sensor and powered by one 9V or 6 AA-size batteries (not included). Tamper-resistant soap level viewing window, swing open body with special lock and key. Capacity: 27 fl. oz. (0.8 L). Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPa•s or cP): 5 – 3500. pH Range: 5.0 ~ 9.0. Soaps containing reportable salts, chlorides and alcohols should be avoided.

KEY FEATURES & SPECIFICATIONS

- Dual Purpose Dispenser - Hand Sanitizer or Soap
- "Touch Free" dispensing for better hygiene
- High-Impact Plastic - White
- Wall Mounted
- Automatic - Battery Operated - "No Touch"
- 27 oz. (800 ml) Capacity

**American Specialties, Inc.****Model #0361****Technical Data Sheet****OPERATION & MAINTENANCE**

Soap is automatically dispensed when hands are placed in sensor zone. Dosage is preset by factory. Unit is reloaded by unlocking lock with special key (supplied), swinging open dispenser body, and removing and refilling internal soap container. Soap dispenser will continue to feed properly until empty. Tank supply is replenished manually on cycle determined by maintenance needs. A complete OM& IG (#P09-00486, OM-0510250841) is provided in carton with each unit.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	4-5/8" x 10-5/16" x 4-7/16" [118 x 262 x 113]
Construction	High-Impact Plastic - White
Mounting	Wall Mounted
Options	N/A

INSTALLATION

Install unit on wall or partition surface with four (4) #8 pan head self-threading screws and wall anchors (supplied). For general utility install unit 42" [1067] to 46" [1168] Above Finished Floor and 10" [254] minimum above countertop. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is 48" [1219] maximum Above Finished Floor (AFF). A MT (#05093041) is provided in carton with each unit. Install six (6) AA-size 1.5V batteries (by others) or one (1) 9V battery in concealed battery compartment according to polarity indication and snap-latch battery door.

WARRANTY

One (1) Year from date of Invoice