

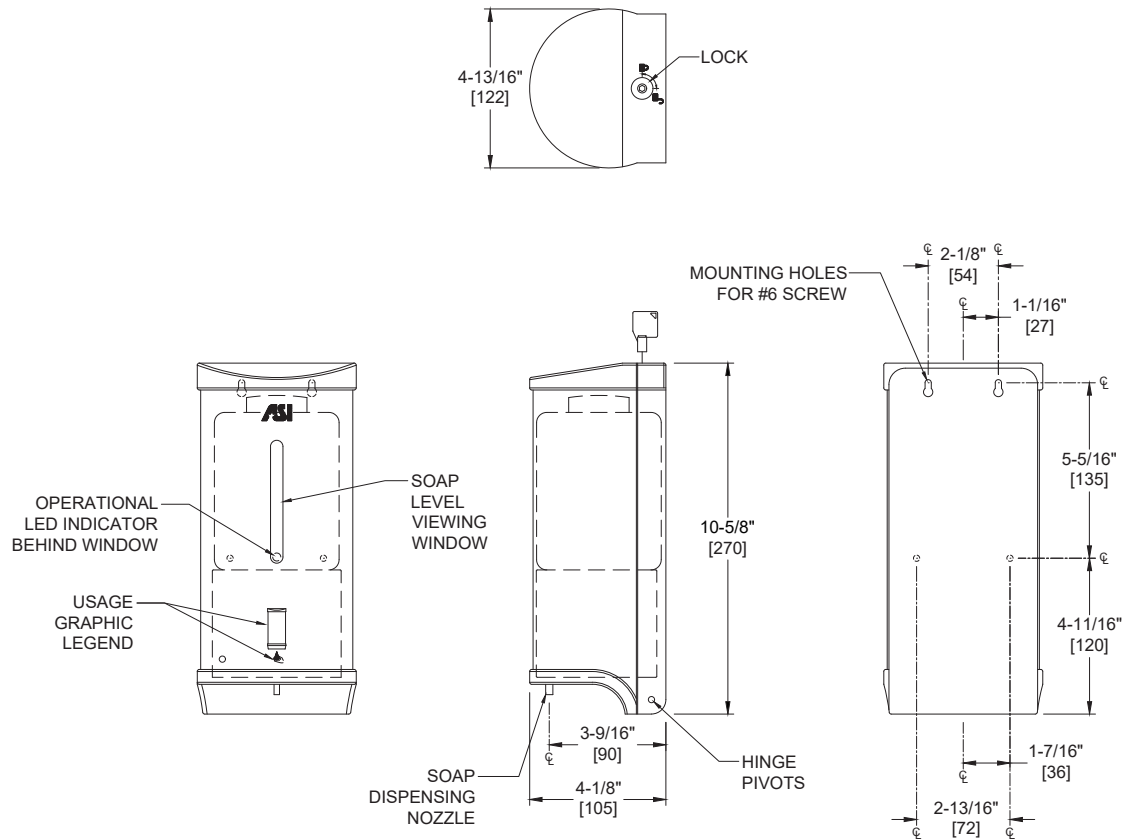

American Specialties, Inc.
Model #0362
Technical Data Sheet
Automatic Liquid Soap & Gel Hand Sanitizer Dispenser – 30 oz. Satin Stainless Steel – Surface Mounted
Soap Dispensers
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)



NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
SEE SOAP DISPENSER CARE & MAINTENANCE
DOCUMENT ONLINE FOR CLEANING

PRODUCT OVERVIEW

Stainless steel soap dispenser in satin finish with proximity sensor. Powered by 6 AA-size batteries (not included) and has tamper-resistant viewing window. Suitable for dispensing higher viscosity/antimicrobial soap. Capacity: 27 oz. (800 ml) using refillable soap cartridge provided. Soap Requirements: Proper usage of this dispenser requires, that only soap within the following range for viscosity and pH may be used. Viscosity Range (mPa•s or cP): 2000 – 5000, pH Range: 5.5 ~ 8.5. Soaps containing reportable salts, chlorides and alcohols should be avoided.

KEY FEATURES & SPECIFICATIONS

- Dual Purpose Dispenser - Hand Sanitizer or Soap
- "Touch Free" dispensing for better hygiene
- Type 304 Stainless Steel - Satin Finish
- Wall Mounted
- Automatic - Battery Operated - "No Touch"
- 27 oz. (800 ml) Capacity - refillable cartridge

**American Specialties, Inc.****Model #0362****Technical Data Sheet****OPERATION & MAINTENANCE**

Soap or gel sanitizer is automatically dispensed when hands are placed in sensor zone. Unit is reloaded by unlocking lock with special key (supplied), swinging open dispenser body and removing and refilling tank or replacing disposable internal container. Dispenser will continue to feed properly until empty. Supply is replenished manually on a cycle determined by maintenance needs. Batteries are replaced yearly or as required for heavy duty operation. See OM & IG for full details.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	4-13/16" x 10-5/8" x 4-1/8" [122 x 270 x 105]
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Wall Mounted
Options	N/A

INSTALLATION

Surface mount unit to wall or partition with four (4) #6 x 15/16" (M3.5x24) self-threading Philips pan head screws (supplied) into dry wall anchors (provided) through concealed mounting holes provided. Recommended installation height for general utility is 42" [1067] to 46" [1168] AFF to bottom of unit. For compliance with 2010 ADA Accessibility Standards install unit so that bottom of unit is no higher than 48" [1219] MAX AFF. Mount unit with bottom 7-7/8" [200] minimum above non-metallic washbasins or countertops and 11-13/16" [300] above stainless steel washbasins or countertops. OM & IG (#0610241228) and a MT (#0610160837) are provided with unit in carton.

WARRANTY

One (1) Year from date of Invoice