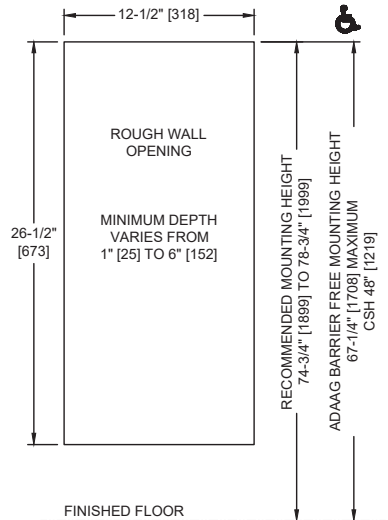
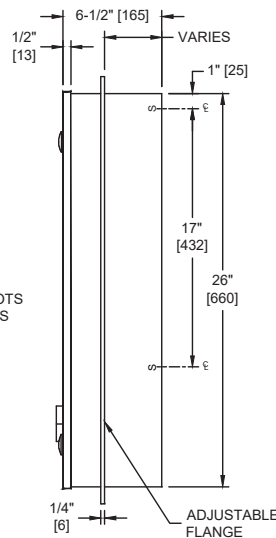
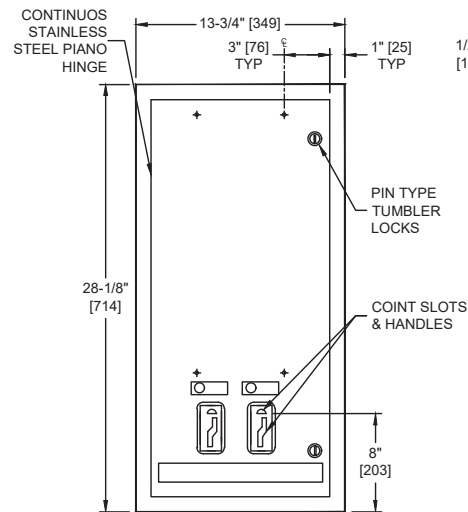



**American Specialties, Inc.**
**Model #0464**
**Technical Data Sheet**
**(30) Napkin/ (27) Tampon Vendor – Semi-Recessed – 25¢ - 50¢ or Free Operation**
*Feminine Hygiene Vendors and Disposals*
*MasterFormat Section 10 28 13*


Scan for Information


**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE &amp; MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

Dispenser includes two dispensing mechanisms, one for 27 tampons, the other for 30 feminine napkins. Furnished with an adjustable flange for recessing in wall depths from 1" [25] to 6" [152]. Universal coin mechanism allows for 25¢, 50¢ and free (no coin) operation. Choose appropriate suffix (-25, -50 or -F). Door shall be 18 gauge type 304 stainless steel alloy 18-8. Cabinet and adjustable trim flange shall be 22 gauge same grade stainless steel. Door shall be attached with a full length 3/16" diameter (Ø4.8) stainless steel multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment.

**KEY FEATURES & SPECIFICATIONS**

- Dual Vendor
- 25¢ - 50¢ or Free Operation
- Type 304 Stainless Steel - Satin Finish
- Semi-Recessed
- 30 Napkins AND 27 Tampons

- ☐0464-25 – allows for 25¢ operation
- ☐0464-50 – allows for 50¢ operation
- ☐0464-F – allows Free (no coin) operation


**American Specialties, Inc.**
**Model #0464**
**Technical Data Sheet**

## OPERATION & MAINTENANCE

Deposit of specified coin allows operation of dispenser. Napkin and tampon dispensers operate independently. Selected product drops into vending opening after operator actuation. Indicator displays empty condition and blocks coin slot when vend product is depleted. Unit vend product supply is replenished on cycle determined by maintenance needs by opening door and manually reloading product into dispenser supply tracks. Empty indicator automatically resets upon refill. Track weights **MUST BE USED** to provide positive feed. Coins are retrieved from cash drawer opened using different key than is used to open door for service.

## TECHNICAL INFORMATION / PRODUCT PROPERTIES

| Property     | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Dimensions   | 12-1/2" [318] x 26-1/2" [673] x 1" [25] to 6" [152]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Construction | Type 304 Stainless Steel - Satin Finish                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Mounting     | Semi-Recessed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Capacity     | <p>NAPKINS, SINGLES, CARDBOARD-BOXED, SEMIGLOSS FINISH<br/> CAPACITY 30 BOX SIZE 4-1/4" [108] x 3" [76] x 1-1/8" [29]</p> <p><input type="checkbox"/> Stayfree# 4<br/> <input type="checkbox"/> Guards# 247, or 147<br/> <input type="checkbox"/> Kotex# 704, 707, 07010, 07040, 07045, 07300, 07320<br/> <input type="checkbox"/> Pure-Nat# M-4<br/> <input type="checkbox"/> Modess# 4</p> <p>TAMPONS, CYLINDER, CARDBOARD, SEMIGLOSS, CRIMPED ENDS<br/> CAPACITY 27 TUBE SIZE 3/4" diameter [Ø19] x 5-1/4" [134]</p> <p><input type="checkbox"/> Tampax# T500<br/> <input type="checkbox"/> Modess Tampons</p> |

## INSTALLATION

Mount unit in wall recess using four (4) #10 self-threading screws (by others) through concealed holes provided in cabinet rear wall. For maximum usability and compliance with 2010 ADA Accessibility Standardss, install unit so that coin slot is between 48" [1219] maximum Above Finished Floor (AFF) and 38" [965] minimum AFF. Note that coin slot is 7-1/4" [184] above bottom edge of rough wall opening (RWO) and bottom trim flange is 3/4" [19] below bottom edge of RWO. Installer must provide adequate wall anchoring for screw mounting. Slide trim flange against wall to dress off edges of RWO.

Rough Wall Opening (RWO) required is 12-1/2" [318] W x 26-1/2" [673] H x 1" [25] D minimum to 6" [152] D maximum

## WARRANTY

One (1) Year from date of Invoice