

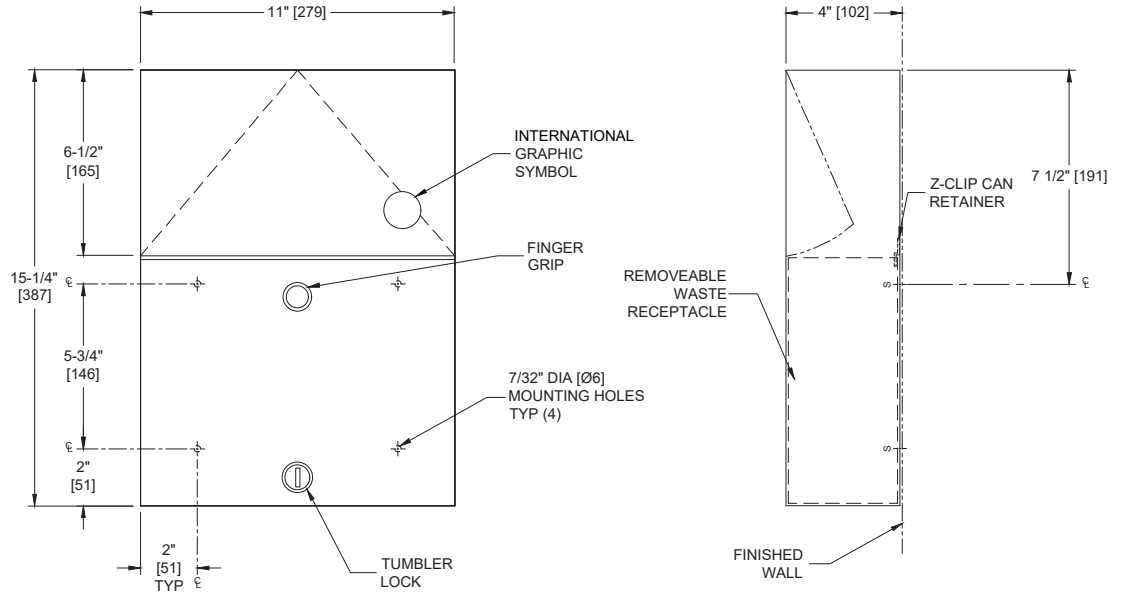

American Specialties, Inc.
Model #0473-1A
Technical Data Sheet
Sanitary Napkin Disposal with Lock – Surface Mounted
Feminine Hygiene Vendors and Disposals
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)


NOTE:

 ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Self-closing door is mounted to cabinet with stainless steel spring hinge. Includes tumbler lock for servicing. Surface mounted unit for end stall installation. User pushes door to deposit waste material. Door is self-closing. Maintenance schedule determines waste removal cycle. Unit is emptied by removing bottom waste container and inverting over collection bag. Waste container is captured by internal angle to prevent inadvertent dumping and key lock to prevent unauthorized access or removal. Safety-edged finger grip provides convenient grip for service. Door, flanges, waste receptacle and cabinet shall be 22 gauge type 304 stainless steel alloy 18-8.

KEY FEATURES & SPECIFICATIONS

- Disposal with Lock
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 1.5 gal (5.7 L) of dry/solids Waste Capacity

**American Specialties, Inc.****Model #0473-1A****Technical Data Sheet****OPERATION & MAINTENANCE**

User pushes door to deposit waste material. Door is self-closing. Maintenance schedule determines waste removal cycle. Unit is emptied by removing bottom waste container and inverting over collection bag. Waste container is captured by internal angle to prevent inadvertent dumping and key lock to prevent unauthorized access or removal. Safety-edged finger grip provides convenient grip for service.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	11" [279] W x 4" [102] D x 15-1/4" [387]
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Surface Mounted
Capacity	1.5 gal (5.7 L) of dry/solids Waste Capacity

INSTALLATION

Surface mount unit on wall using #10 self-threading screws (by others). For maximum usability and compliance with 2010 ADA Accessibility Standards, unit should be installed so that top of disposal door is between 34" [864] maximum Above Finished Floor (AFF) and 24" [610] minimum AFF.

WARRANTY

One (1) Year from date of Invoice