


**American Specialties, Inc.****Model #0481-HCR****Technical Data Sheet****Toilet Seat Cover & Toilet Tissue Dispensers w/ Napkin Disposal (Dual Access) for Handicapped – Reverse***Combination Units**Traditional***MasterFormat Section 10 28 13**Scan for
Information**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

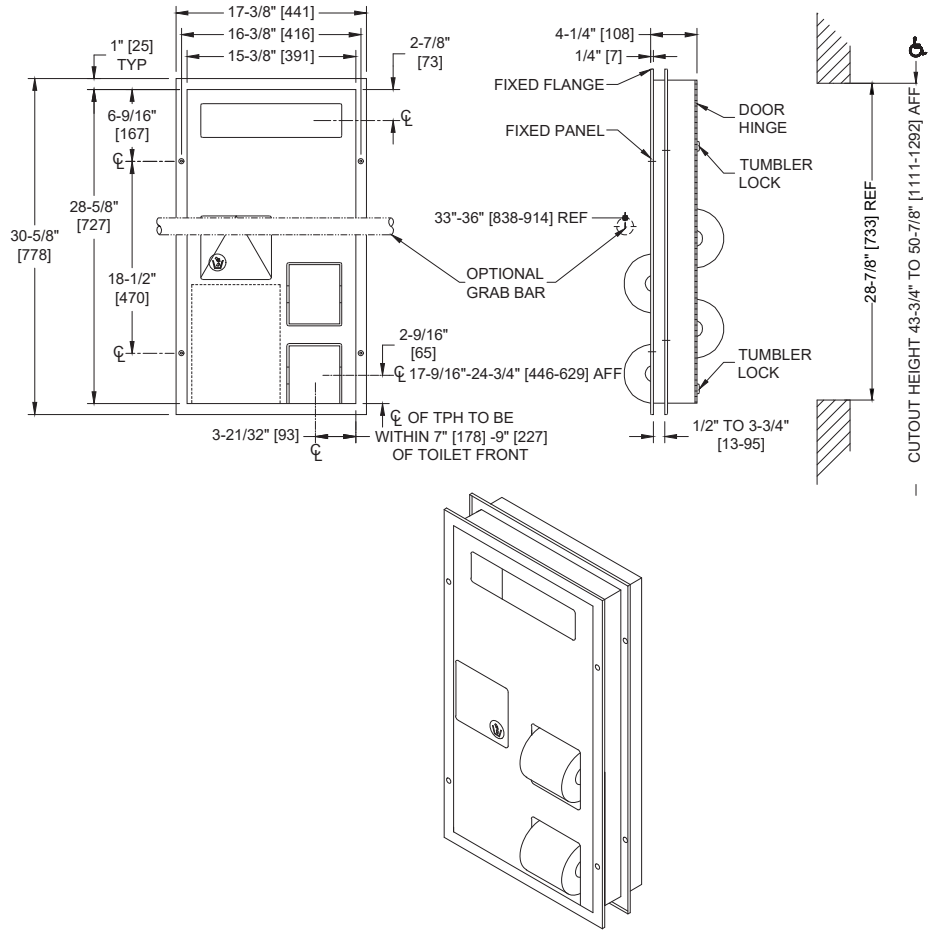

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Toilet tissue and receptacle on opposite sides of 0481-HC. One side mounts flush on barrier-free compartment side to allow grab bar clearance. Usable by both sides but serviced from one side. Access door shall be opposite HC stall. Holds 1000 seat covers and 4 rolls of standard or 1800 sheet 4-1/2" [114] x 5-1/4" [133] toilet paper. Removable waste container has a waste capacity of 1.3 gal (4.9 liters). Cabinet door is held closed with two (2) tumbler locks. Cabinet also includes theft and vandal resistant rollers molded of high-impact resistant plastic with integral molded-in stainless steel endpins and four (4) rollers [p/n R-004] are supplied. Dispenser door shall be 18 gauge type 304 stainless steel satin finish, face frame & Cabinet shall be 22 gauge same material. Cabinet door attached w/ multi staked piano hinge and tumbler lock.

KEY FEATURES & SPECIFICATIONS

- Dual Access - Partition Mount.
- Seat Cover / Fem Disposal / Combo
- Type 304 Stainless Steel - Satin Finish.
- Internal baffles prevent line of sight between stalls.
- Partition Mounted.
- 1,000 seat covers / 4 Rolls of Toilet Tissues / 1.3 Gal. (4.9 L) Removable Waste Can.


American Specialties, Inc.

Model #0481-HCR

Technical Data Sheet

OPERATION & MAINTENANCE

Push self-closing disposal door to deposit waste material. Doors operate independently and may be used simultaneously. Seat covers are self-feeding until supply is depleted. Toilet paper rolls feed freely until depleted and level of supply is constantly visible for low-level warning. Waste receptacle is emptied manually on cycle determined by maintenance needs. Toilet paper rolls, paper seat covers and waste receptacle are serviced by unlocking and opening door. Locked door prevents inadvertent dumping and unauthorized removal. Waste container safety-edged finger hole provides convenient grip for service. Toilet paper spindles are carried in vandal resistant subframe accessible when door is opened. Barrier baffle panels preserve privacy between stalls at all times.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-3/8" [441] W x 4-1/4" [108] x 30-5/8" [778] H
Construction	Type 304 Stainless Steel - Satin Finish Internal baffles prevent line of sight between stalls
Mounting	Partition Mounted
Capacity	1,000 seat covers 4 Rolls of Toilet Tissues

INSTALLATION

Mount unit in partition using #10 x 3/4" Philips oval head self-threading screws (supplied). Holes in flanges are offset to prevent screw interference. For compliance with ICC/ANSI A-117.1 and 2010 ADA Accessibility Standards top of cutout should be between 43-3/4" [1111] and 50-7/8" [1292] Above Finished Floor (AFF). One trim mounting flange adjusts for partition thickness of 1/2" [13] to 3-3/4" [95]. To comply with CalDAG mounting height, top of cutout should be 42-7/8" [1089] maximum AFF. Note partition cutout is 7/8" [22] below top of face trim. If optional grab bar is used (not supplied) it is positioned across unit with top of grip surface at 33" [838] minimum AFF.

Partition Cutout Required: 15-1/2" [394] W x 28-7/8" [733] H x 1/2" [13] to 3-3/4" [95] thick partition

WARRANTY

One (1) Year from date of Invoice