

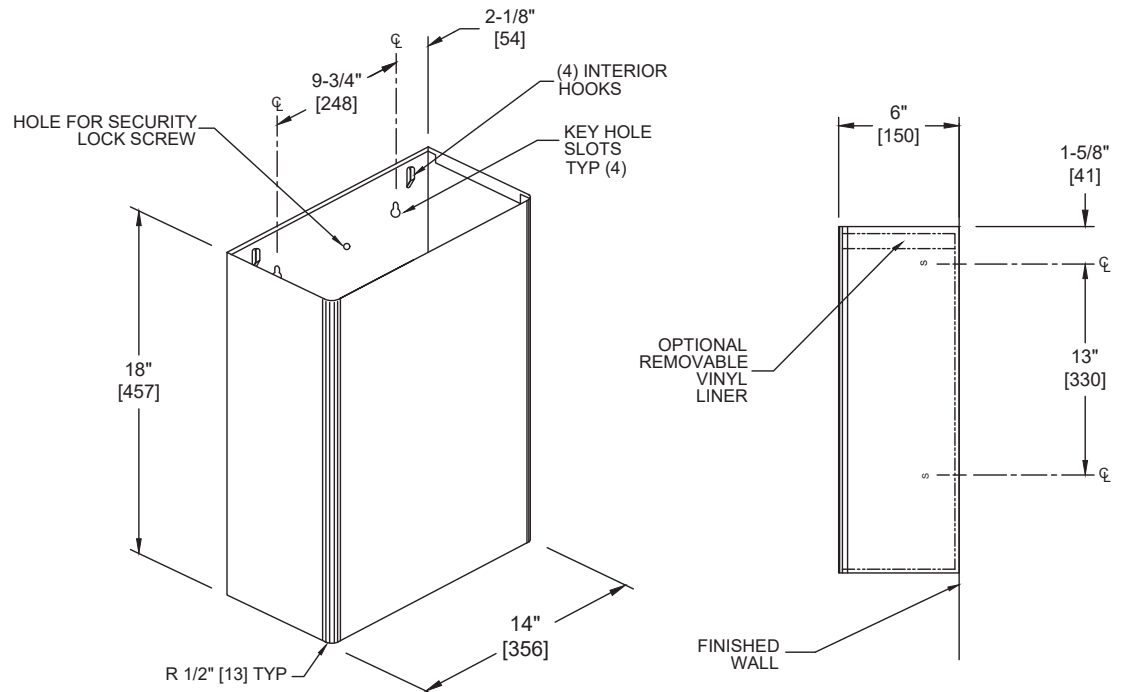

American Specialties, Inc.
Model #0828
Technical Data Sheet
Waste Receptacle (6.5 gal.) – Surface Mounted
Waste Receptacles
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)



NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Holds 6.5 gal. [24.8 liters] of dry solid waste. Receptacle includes four (4) interior hooks for hanging a reusable heavy gauge vinyl liner bag with grommets. Receptacle is screw mounted to wall through keyhole slots on back of unit and is theft resistant after installation of concealed locking screw. Unit is emptied by removing either disposable bag (supplied by others) or reusable liner bag (available separately) to empty into appropriate bulk collection container. Unit shall be 22 gauge type 304 stainless steel alloy 18-8 with satin finish and be protected during shipment with a PVC film easily removable after installation.

KEY FEATURES & SPECIFICATIONS

- Has interior hooks for hanging a reusable bag (sold separately)
- Type 304 Stainless Steel - Satin Finish
- Screw Mounted to Wall
- Surface Mounted
- 6.5 Gal. (24.8 L) Waste Capacity

**American Specialties, Inc.****Model #0828****Technical Data Sheet****OPERATION & MAINTENANCE**

User deposits waste material. Maintenance schedule determines trash removal cycle. Unit is emptied by removing either disposable bag (supplied by others) or reusable liner bag (available separately) to empty into appropriate bulk collection container.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14" [356] W x 18" [457] H x 6" [152] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Screw Mounted to Wall
Capacity	6.5 Gal. (24.8 L) Waste Capacity

INSTALLATION

For general utility, mount the receptacle 22" [559] Above Finished Floor (AFF) from bottom of unit. Hang unit on preinstalled four (4) screws (by others) on wall through the mounting keyhole slots. Install and fasten theft-resistant screw (by others) to wall through top middle hole of receptacle. For compliance with 2010 ADA Accessibility Standards, install unit with top edge no higher than 48" [1219] Above Finished Floor (AFF).

OPTIONS

N/A

WARRANTY

One (1) Year from date of Invoice