

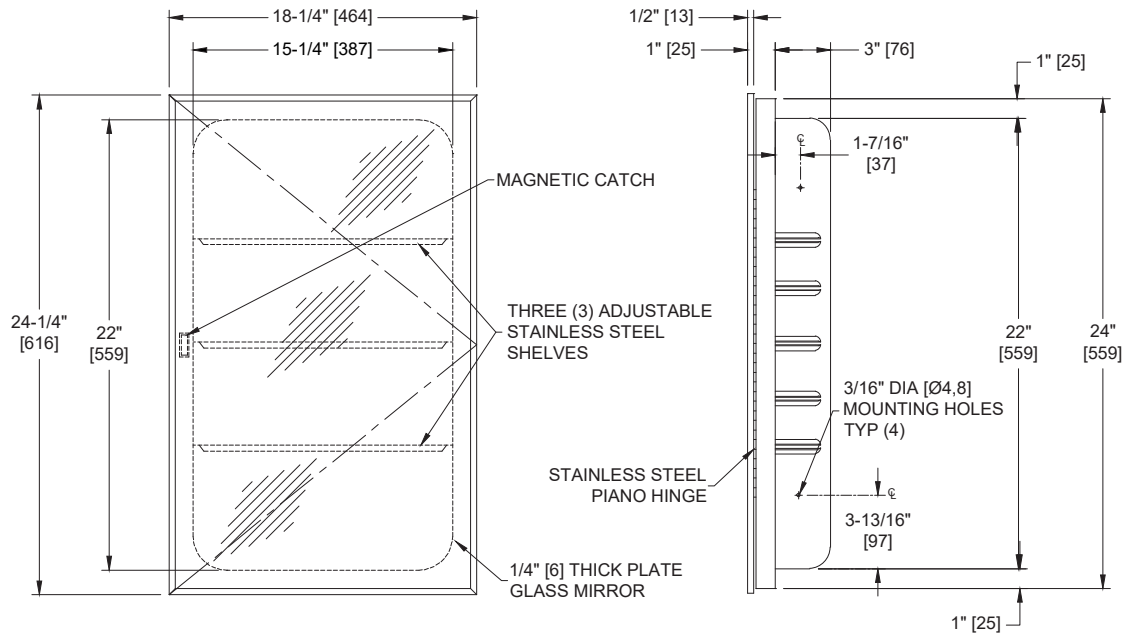

American Specialties, Inc.
Model #0952
Technical Data Sheet
Medicine Cabinet (18-1/4" [463] W x 24-1/4" [616] H) – Recessed - Stainless Steel
Healthcare Accessories
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)


NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Swing door mirror frame is type 304 stainless steel with satin finish. Mirror is 1/4" [6], guaranteed for 15 years against silver spoilage. Door has full length piano hinge and magnetic catch. Three removable stainless steel shelves. User pulls door to access contents and manually pushes door shut. Adjust shelf spacing by removing shelves and reinserting in any of five (5) internally embossed tracks on each side of cabinet interior.

KEY FEATURES & SPECIFICATIONS

- Swing Door Mirror Cabinet
- 22 gauge alloy 18-8 - Satin Finish
- Heavy duty stainless steel multi-staked piano hinge and shall be held closed by a magnetic catch
- Recessed
- 18-1/4" [464] W x 24-1/4" [616] H

**American Specialties, Inc.****Model #0952****Technical Data Sheet****OPERATION & MAINTENANCE**

Pull the door to access contents and manually push door to engage magnetic catch that holds door shut. Shelf spacing may be adjusted by removing shelves and inserting in any of five (5) internally embossed tracks on each side of cabinet interior.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	18-1/4" [464] W x 24-1/4" [616] H x 4-1/2" [114] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	N/A

INSTALLATION

Unit is mounted in wall recess using four (4) #10 pan head self-threading screws (by others) through concealed mounting holes provided in cabinet sides. For general utility mount unit 46" [1168] Above Finished Floor (AFF) to bottom of unit or 12" [305] above wash basin. For compliance with 2010 ADA Accessibility Standards install unit so that bottom edge of mirror is 40" [1016] maximum Above Finished Floor (AFF). Note that bottom edge of reflecting surface is 3/4" [19] below Rough Wall Opening (RWO).

Rough Wall Opening (RWO) required is 16" [406] W x 22-3/4" [578] H x 3-1/2" [89] D minimum

WARRANTY

One (1) Year from date of Invoice