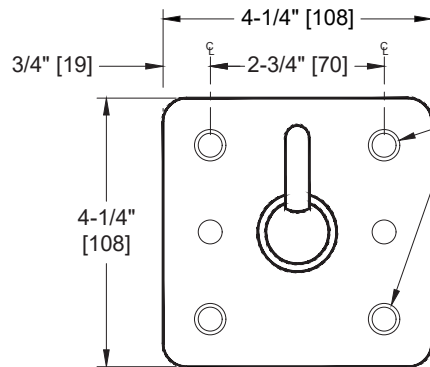
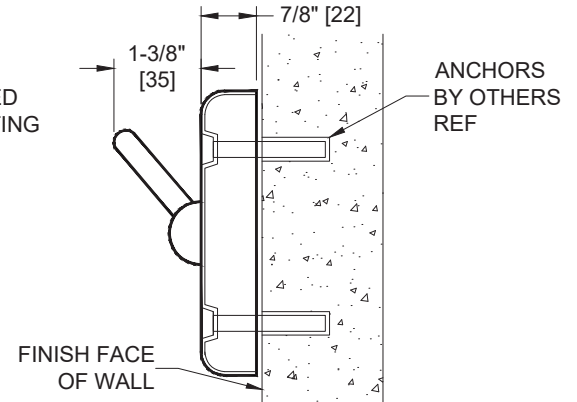



American Specialties, Inc.
Model #123
Technical Data Sheet
Clothes Hook, Square – Front Mount
Security Accessories
MasterFormat Section 10 28 13

 DIMPLED
MOUNTING
HOLES

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:

 ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Fabricated of 12 gauge type 304 stainless steel with a satin finish. Back plate is fabricated of 14 gauge stainless steel. If hook is excessively loaded, it will snap down for safety. Square shape. Unit has four holes for front mounting.

KEY FEATURES & SPECIFICATIONS

- Built for high security environments
- 1/4-20 button head pinTorx® machine screws supplied.
- Type 304 Stainless Steel - Satin Finish
- Front Mount
- Anti-Ligature Snap Down Hook
- 14 gauge wall plate

**American Specialties, Inc.****Model #123****Technical Data Sheet****OPERATION & MAINTENANCE**

Clothes hook is tensioned to release down when overloaded beyond the 35 lb (16 kg) limit.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	3" [76] W x 5" [127] H x 3-1/16" [78] D
Construction	Type 304 Stainless Steel - Satin Finish 12 gauge Anti-Ligature Snap Down Hook
Mounting	Front Mount
Capacity	

INSTALLATION

Unit is front mounted to wall or partition using four (4) 1/4-20 x 2" [M6x50] flat head pin-Torx® machine screws (supplied) into suitable anchors (by others) or alternate wall preparation (by others). Anchors to be supplied by installer to suit wall condition. For compliance with 2010 ADA Accessibility Standards, install unit so the centerline of the hook is 48" [1219] maximum Above Finished Floor (AFF).

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice