


American Specialties, Inc.
Model #204623
Technical Data Sheet
Roval™ Recessed Paper Towel Dispenser & Removable Waste Receptacle
Paper Towel Combination Units
Roval
MasterFormat Section 10 28 13

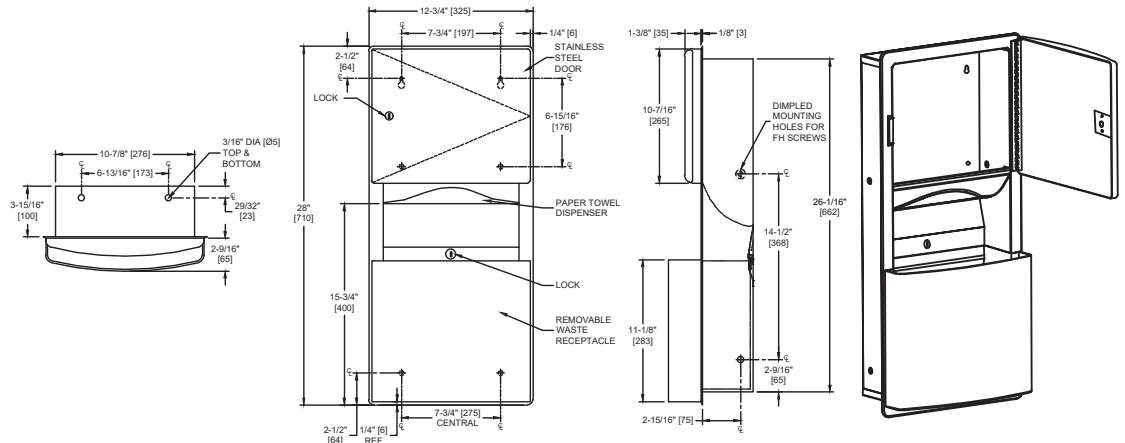
 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)

MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)


NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

 FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Dispenses 350 C-fold, 475 multi-fold paper towels. 3.0 gal. (11.2 L) removable stainless steel waste receptacle with a tumbler lock. 22 gauge type 304 stainless steel door in a satin finish with a flush lock and a heavy-duty 3/16" [4,7] staked piano hinge on door. Towels are self-feeding upon user manual demand until supply is depleted. Unit may be reloaded with a partial load in place and will continue to feed properly. Towels are replenished and waste receptacle is emptied manually. Locked door and waste receptacle prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Curved front adds strength and elegance
- Concealed, Multi-Staked Piano Hinge - Removable Waste Can
- Type 304 Stainless Steel - Satin Finish
- Recessed
- Pull Type
- 350 C-Fold or 475 Multi-Fold / 3.0 Gal. (11.2 L) Waste Capacity


American Specialties, Inc.
Model #204623
Technical Data Sheet

OPERATION & MAINTENANCE

Towels are self-feeding upon user manual demand until supply is depleted. Unit may be reloaded with a partial load in place and will continue to feed properly. Towels are replenished and waste receptacle is emptied manually on a cycle determined by maintenance needs. Locked door and waste receptacle prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	12-3/4" [325] W x 28" [710] H x 6-1/2" [165] D
Construction	Type 304 Stainless Steel - Satin Finish Pull Type
Mounting	Recessed
Capacity	350 C-Fold or 475 Multi-Fold / 3.0 Gal. (11.2 L) Waste Capacity

INSTALLATION

Recess mount unit in wall using four (4) #8 self-threading flat head screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that centerline of towel dispenser slot is 48" [1219] maximum Above Finish Floor (AFF) if clear floor reach access is provided. Install unit for general utility with bottom edge 40" [1016] AFF.

Rough Wall Opening (RWO) required is 11-1/4" [286] W x 26-7/16" [672] H x 3-15/16" [100] D minimum

WARRANTY

One (1) Year from date of Invoice