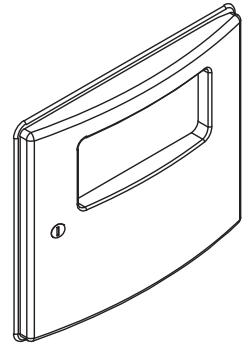
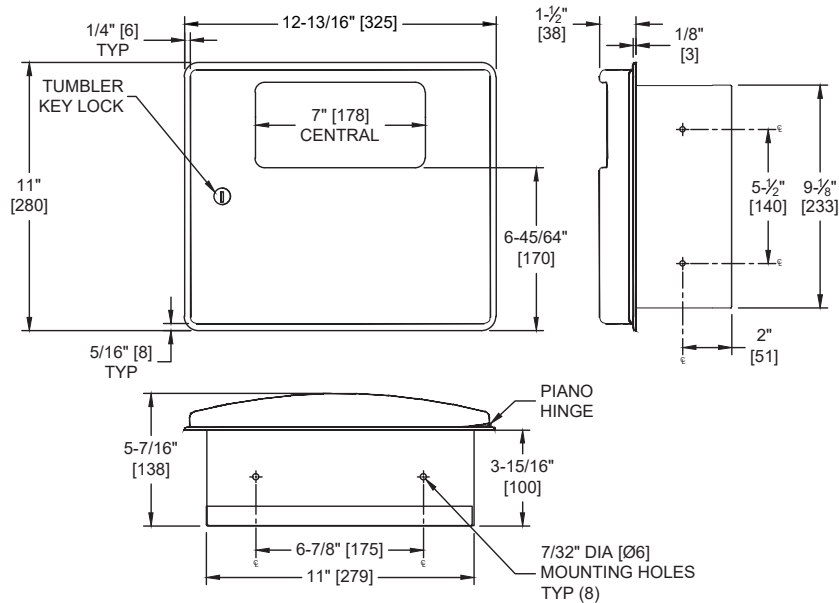


**American Specialties, Inc.****Model #20470****Technical Data Sheet****Roval™ Recessed Sanitary Napkin Disposal***Feminine Hygiene Vendors and Disposals**Roval**MasterFormat Section 10 28 13*Scan for
Information**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS**PRODUCT OVERVIEW**

Heavy-duty 9/64" [3,6] staked piano hinge adds to the robust construction. Drawn one-piece seamless door of 22 gauge type 304 stainless steel with a satin finish. 1.0 gal. (3.7 L) waste capacity. Users push door to deposit waste material into receptacle. Push-door is self-closing. Empty refuse manually on a cycle determined by maintenance needs by removing waste container and inverting over collection bag. Hemmed edges on waste container provide safety for service. Locked door prevents unauthorized access or removal. Full face door shall be fabricated of 22 gauge type 304 stainless steel alloy 18-8, with no exposed fastening devices or spot-welded seams.

KEY FEATURES & SPECIFICATIONS

- Curved front adds strength and elegance
- Concealed, Multi-Staked Piano Hinge - Removable Waste Can
- Type 304 Stainless Steel - Satin Finish
- Recessed
- Self-Closing push door
- 1.0 Gal. (3.7 L) Waste Capacity

**American Specialties, Inc.****Model #20470****Technical Data Sheet****OPERATION & MAINTENANCE**

Users push door to deposit waste material into receptacle. Push-door is self-closing. Empty refuse by removing waste container and inverting over collection bag. Safety finger grip on waste container provides convenient grip for service. Locked door prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	12-13/16" [325] W x x 5-7/16" [138] D x 11" [280] H
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Recessed
Capacity	1.0 Gal. (3.7 L) Waste Capacity

INSTALLATION

Mount unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that top of waste receptacle door is 48" [1219] maximum Above Finished Floor (AFF) if clear floor reach access is provided. For general utility install unit with bottom edge 44-3/16" [1123] AFF. Note that top of rough wall opening (RWO) is 45/64" [18] below top of frame.

Rough Wall Opening (RWO) required is 11-3/8" W [289] x 9-5/8" H [244] x 4" D [102] minimum

WARRANTY

One (1) Year from date of Invoice