



American Specialties, Inc.


Model #6452

Technical Data Sheet


Simplicity™ Collection Paper Towel Dispenser (Multi, C-Fold) – Recessed


Paper Towel Dispensers

MasterFormat Section 10 28 13



Scan for Information






SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

Simplicity

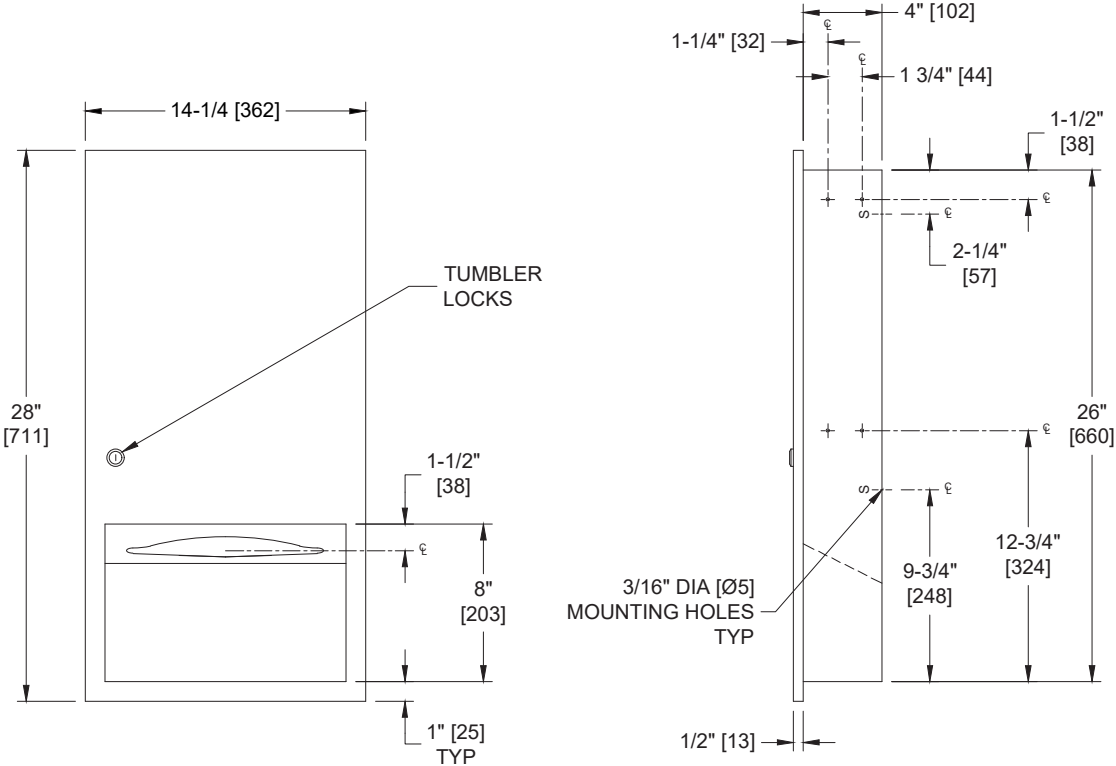

NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN

PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Holds and dispenses 600 C-fold or 800 multi-fold paper towels. Door held closed with a tumbler lock. All exposed surfaces have a satin finish. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Locking door prevents unauthorized access or removal.

Key Features & Specifications

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 600 C-Fold OR 800 Multi-Fold

**American Specialties, Inc.****Model #6452****Technical Data Sheet****OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Locking door prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 28" [711] H x 4-1/2" [114] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" Dia. [Ø5]
Power	N/A
Operation	Manual
Mounting	Recessed
Capacity	600 C-Fold OR 800 Multi-Fold

INSTALLATION

Mount unit in wall recess using #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that centerline of towel dispenser slot is 48" [1219] maximum above finished floor (AFF). For general utility mount unit 42" [1067] from top of finished floor to bottom of unit.

Rough Wall Opening (RWO) required is 12-3/4" [324] W x 26-1/2" [673] H x 4-1/4" [108] D minimum

WARRANTY

One (1) Year from date of Invoice