

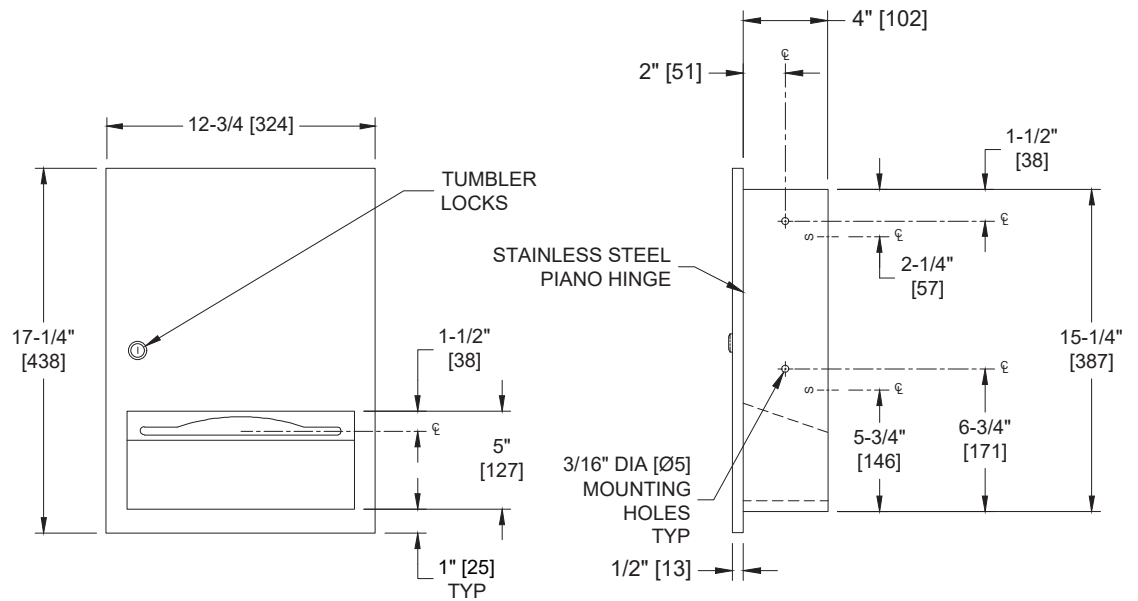

American Specialties, Inc.
Model #6457
Technical Data Sheet
Simplicity™ Collection Paper Towel Dispenser (475 Multi, 350 C-Fold) – Recessed
Paper Towel Dispensers
Simplicity
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)


NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Well-suited for the smaller washroom with less space and traffic, this unit dispenses 350 C-fold or 475 multi-fold paper towels. Door held closed with tumbler lock. All exposed surfaces have satin finish. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Type 304 Stainless Steel - Satin Finish
- Recessed
- 350 C-Fold OR 475 Multi-Fold

**American Specialties, Inc.****Model #6457****Technical Data Sheet****OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	12-3/4" [324] W x 17-1/4" [438] H x 4-1/2" [114] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" Dia. [Ø5]
Power	N/A
Operation	Manual
Mounting	Recessed
Capacity	350 C-Fold OR 475 Multi-Fold

INSTALLATION

Mount unit in wall recess using #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with 2010 ADA Accessibility Standards install unit so that centerline of towel dispenser slot is 48" [1219] maximum above finished floor (AFF). For general utility mount unit 42" [1067] from top of finished floor to bottom of unit. Note that top of RWO is 3/4" [19] below top of unit.

Rough Wall Opening (RWO) required is 11-1/4" [286] W x 15-3/4" [400] H x 4-1/4" [108] D minimum

WARRANTY

One (1) Year from date of Invoice