


American Specialties, Inc.
Model #64623-9
Technical Data Sheet
Simplicity Collection Paper Towel Dispenser (475 Multi - 350 C-Fold) & Waste Receptacle – Surface Mounted
Paper Towel Combination Units
Simplicity
MasterFormat Section 10 28 13

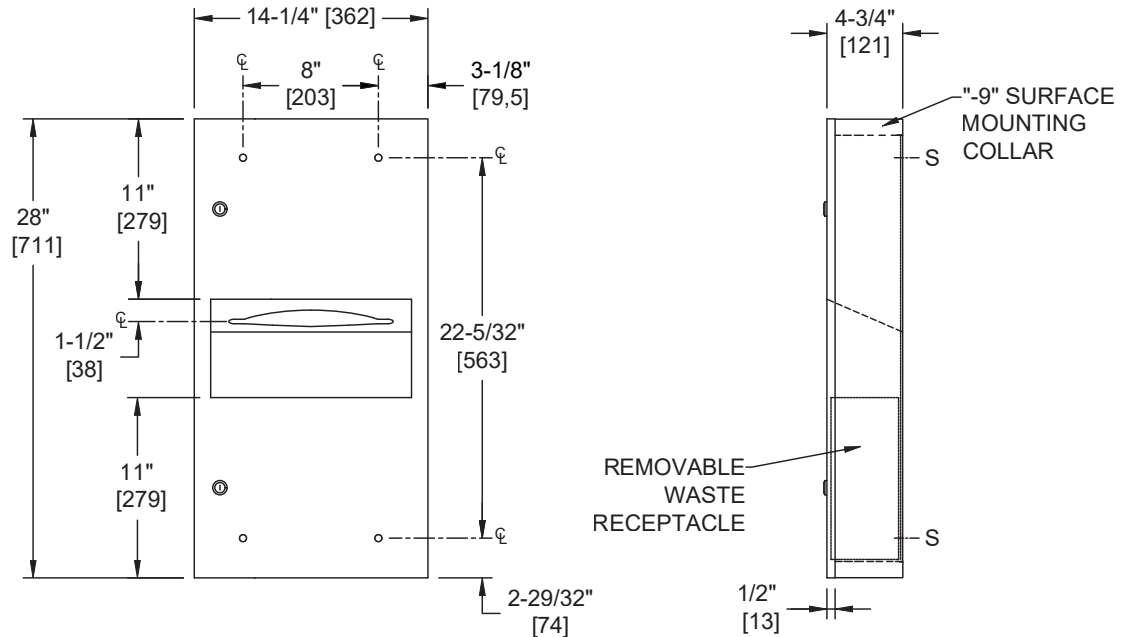
 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)

MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)


NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Well-suited for the smaller washroom with less space and traffic, this unit dispenses 350 C-fold or 475 multi-fold paper towels. Includes 2.2 gal. (8.4 L) stainless steel waste receptacle. Door held closed with tumbler lock. All exposed surfaces have satin finish. Surface mounted with stainless steel collar. Towels are self feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Locked door prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Type 304 Stainless Steel - Satin Finish
- Surface Mounted - w/ -9 Collar
- 350 C-Fold or 475 Multi-Fold / 2.2 Gal. (8.4 L) Waste Capacity

**American Specialties, Inc.****Model #64623-9****Technical Data Sheet****OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit will continue to feed properly when reloaded with a partial load in place. Waste receptacle is emptied manually on a cycle determined by maintenance needs. Locked door prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	14-1/4" [362] W x 28" [711] H x 4-3/4" [121] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" diameter [Ø5]
Mounting	Surface Mounted - w/ -9 Collar
Capacity	350 C-Fold or 475 Multi-Fold / 2.2 Gal. (8.4 L) Waste Capacity

INSTALLATION

Mount unit on wall with #10 self-threading screws (by others) through concealed mounting holes provided. For general utility, unit should be installed with its bottom edge 40-3/4" [1035] Above Finished Floor.

WARRANTY

One (1) Year from date of Invoice