


American Specialties, Inc.
Model #6462
Technical Data Sheet
Simplicity Collection Paper Towel Dispenser & Waste Receptacle – Recessed
Paper Towel Combination Units
Simplicity
MasterFormat Section 10 28 13

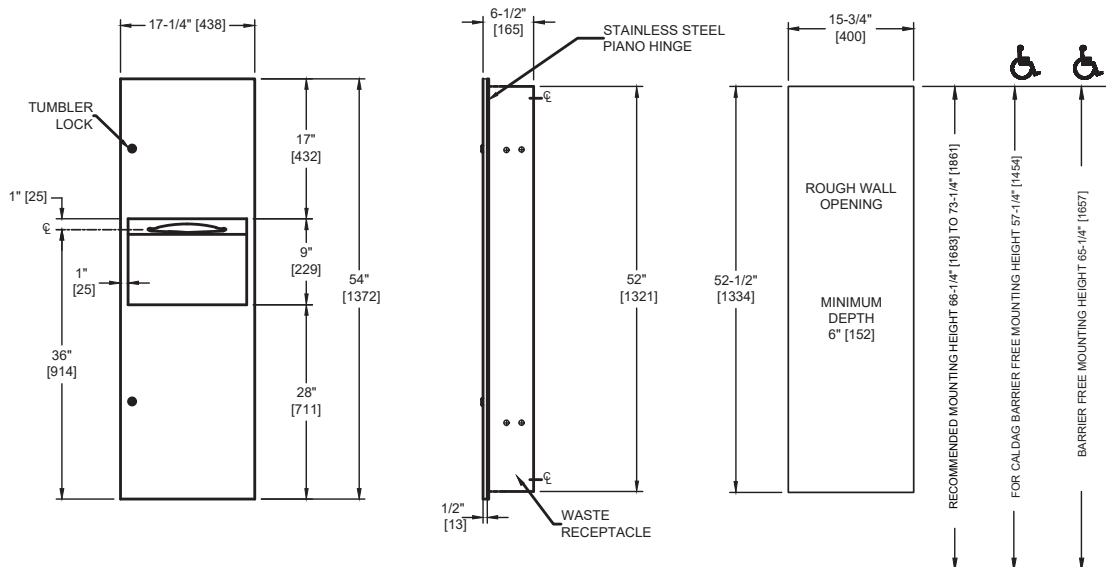
 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)

MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)


NOTE:

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

 FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Dispenses 800 multi-fold, or 600 C-fold towels, standard. Provided adapter allows the flexibility to change the capacity to up to 1,100 single-fold paper towels. 9 gal. (34 L) stainless steel waste receptacle. Paper towels are manually withdrawn through dispensing slot. An adjustable towel adapter ensures that towels feed properly until depleted. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Locking full-face door over compartments prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5] with two (2) tumbler locks
- Type 304 Stainless Steel - Satin Finish, Cabinet 20 gauge
- With two (2) tumbler locks
- Recessed
- Comes with adapter to change capacity to up to 1,100 single-fold paper towels.
- 800 Multi-Fold or or 600 C-Fold towels / 9.0 Gal. (34.0 L) Waste Capacity, standard


American Specialties, Inc.
Model #6462
Technical Data Sheet

OPERATION & MAINTENANCE

Paper towels are manually withdrawn through dispensing slot. An adjustable towel adapter ensures that towels feed properly until depleted. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-1/4" [438] W x 54" [1372] H x 6-9/16" [166] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" diameter [Ø5]
Mounting	Recessed
Capacity	800 Multi-Fold or or 600 C-Fold towels / 9.0 Gal. (34.0 L) Waste Capacity, standard

INSTALLATION

Mount unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. For compliance with ICC/ANSI A-117.1-2003 and 2010 ADA Accessibility Standards install unit with centerline of towel dispenser slot 48" [1219] maximum Above Finish Floor (AFF) only if clear floor forward reach or side reach access is provided. Be advised that local codes may require mounting centerline of towel dispenser slot 40" [1016] max AFF (e.g. California UBC/Title 24). Note that top of Rough Wall Opening (RWO) is 3/4" [19] below top of unit. For general utility install unit with centerline of towel dispenser slot between 49" [1245] and 56" [1422] AFF.

Rough Wall Opening (RWO) required is 15-3/4" [400] W x 52-1/2" [1335] H x 6" [152] D minimum

WARRANTY

One (1) Year from date of Invoice