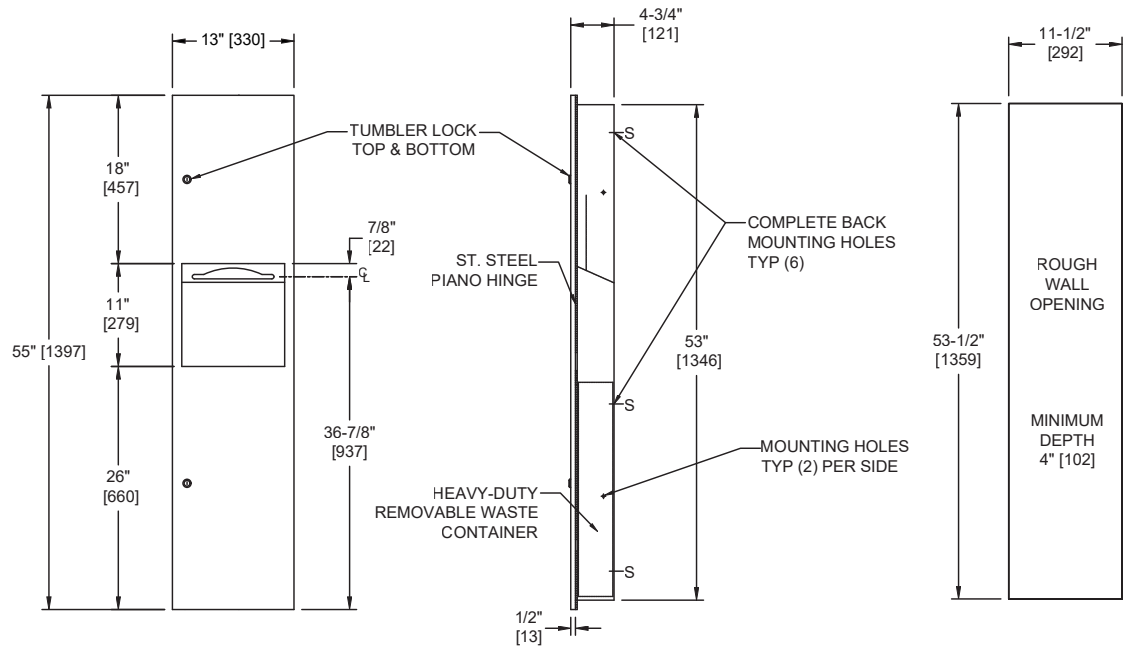



American Specialties, Inc.
Model #6467
Technical Data Sheet
Simplicity Collection Paper Towel Dispenser & Waste Receptacle – Recessed
Paper Towel Combination Units
Simplicity
MasterFormat Section 10 28 13

NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SUSTAINABILITY/LEED

MR 4.1 (1) EQ 4.1 (1)

MR 4.2 (1) EQ 4.2 (1)

MR 6 (1) EQ 4.4 (1)

PRODUCT OVERVIEW

Dispenses 600 C-fold or 800 multi-fold paper towels. 4.2 gal. (16 L) stainless steel waste receptacle. Door held closed with two (2) tumbler locks. Waste receptacle has a rolled edge finger hole for easy servicing. Paper towels are manually withdrawn through dispensing slot. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Locking full-face door over compartments prevents unauthorized access or removal.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter [Ø5]
- Type 304 Stainless Steel - Satin Finish
- Cabinet 20 gauge
- Recessed
- 600 C-Fold or 800 Multi-Fold / 4.2 Gal. (16.0 L) Waste Capacity

**American Specialties, Inc.****Model #6467****Technical Data Sheet****OPERATION & MAINTENANCE**

Paper towels are manually withdrawn through dispensing slot. An adjustable towel adapter ensures that towels feed properly until depleted. Unit will continue to feed properly when reloaded with a partial load in place. Refill dispenser by unlocking door and replacing towels for an empty or partially empty unit. Dispenser supply is replenished and waste container is emptied manually on cycles determined by maintenance needs. Locking full-face door over compartments prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	13" [330] W x 55" [1397] H x 4-3/4" [121] D
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" diameter [Ø5]
Mounting	Recessed
Capacity	600 C-Fold or 800 Multi-Fold / 4.2 Gal. (16.0 L) Waste Capacity

INSTALLATION

Install unit in wall recess with #10 self-threading screws (by others) through concealed mounting holes provided. Note that top of rough wall opening (RWO) is 3/4" [19] below top of unit. For compliance with 2010 ADA Accessibility Standards, install unit so that centerline of towel dispenser slot is 48" [1219] maximum Above Finish Floor (AFF).

Rough Wall Opening (RWO) required is 11-1/2" [292] W x 53-1/2" [1359] H X 4" [102] D minimum

WARRANTY

One (1) Year from date of Invoice