



American Specialties, Inc.





Model #7322

Technical Data Sheet

Soap Basket

Shower/Tub Accessories

MasterFormat Section 10 28 13

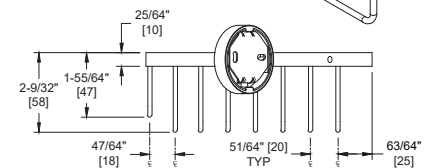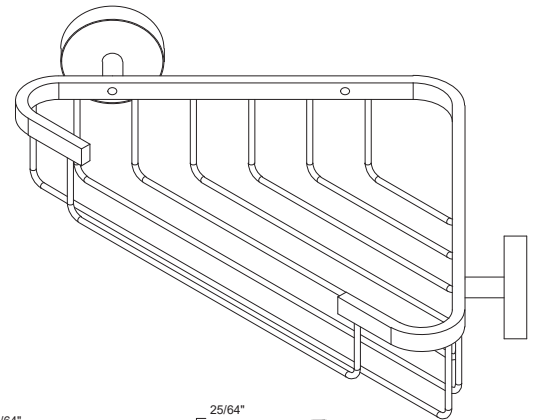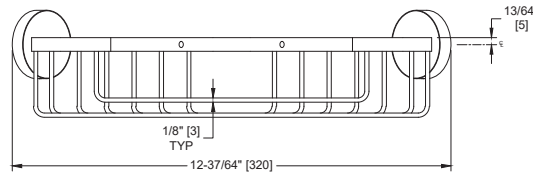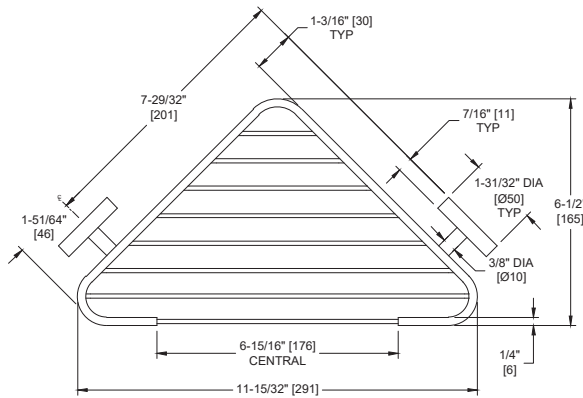

Scan for
Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:

ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

Soap basket has open spaces between wires to allow excess water to drain away from soap and promote drying. Properly installed basket will support up to 10 lbs (4.5 kg) of bath products. Satin-finish stainless steel on all visible surfaces. Stainless steel setscrew provided on bottom perimeter of flanges to lock unit to mounting plates.

KEY FEATURES & SPECIFICATIONS

- Type 304 Stainless Steel - Satin Finish

**American Specialties, Inc.****Model #7322****Technical Data Sheet****OPERATION & MAINTENANCE**

Soap basket has open spaces between wires to allow excess water to drain away from soap and promote drying. Properly installed basket will support up to 10 lbs (4.5 kg) of bath products.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	11-15/32" [291] W x 2-9/32" [58] H x 6-1/2" [165] D
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Wall Mounted
Capacity	

INSTALLATION

Surface mount unit on wall using four (4) #6 x 1-3/8" (M4x35) self-threading screws (supplied) through holes provided in mounting plates into anchors (supplied) in suitably prepared walls (by others) or other suitable mounting hardware (by others) to suit wall conditions. Waterproof screw penetrations through tiles in wet area installations. Hang basket post and flange assemblies on mounting plates and tighten setscrews to lock unit to plates with hex key provided. For compliance with 2010 ADA Accessibility Standards install unit with top of soap dish 48" [1219] maximum above finished floor (MAX AFF) if clear floor reach access is provided or 46" [1168] MAX AFF if side reach access over an obstruction (e.g. shower bench) with reach depth greater than 10" [254] and less than 25" [635] is only provided or 44" [1118] MAX AFF if forward reach over an obstruction with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility mount unit with top rim of soap basket 55" to 65" [1397 to 1651] above shower floor.

ADDITIONAL INFORMATION

N/A

WARRANTY

One (1) Year from date of Invoice