



# American Specialties, Inc.

**BERLS.COM** 

# Model #7382-S

### **Technical Data Sheet**

## Hat & Coat Hook – Surface Mounted, Satin Finish

Specialty Accessories

#### MasterFormat Section 10 28 13




Scan for Information



# Sustainability/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1) MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

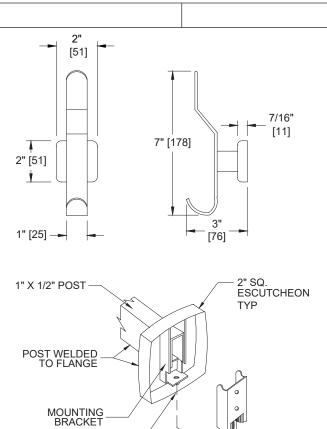

NOTE: ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

LOCK SCREW

MOUNTING PLATE

#### PRODUCT OVERVIEW

Double hook made from stainless steel for both coats and hats. Hook post are 1/2" x 1" [13 x 25] rectangular tubing with formed mounting flange and bracket welded on end. Hook is 1" x 7" [25 x 178] and internally welded to outer end. Model Option Notes: 7382-B - Bright Finish 7382-S - Satin Finish

## **KEY FEATURES & SPECIFICATIONS**

- Type 304 Stainless Steel Satin Finish
- Surface Mounted

Saw Mill River Road, Yonkers, NY American Specialties, Inc. 10701 (914)476-9000 | www.americanspecialties.com Model: #7382-S Revision: R2 Issued: 11/1/2021 Revised: 5/26/2023

CSI:10 28 13 **Toilet Accessories** 



# Model #7382-S

**Technical Data Sheet** 

## **OPERATION & MAINTENANCE**

TECHNICAL INFORMATION / PRODUCT PROPERTIES	
Property	Value
Dimensions	2" x 7" x 3" [51 x 178 x 76]
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Surface Mounted
Capacity	N/A

(704) 937-2673

### INSTALLATION

Surface mount unit on door or wall using #10 self-threading screws (by others) through holes provided in mounting plate into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit door or wall conditions. Hang post and flange assembly on mounting plate and tighten setscrew to lock unit to plate. For compliance with ICC/ANSI A- 117.1-2003 and ADA Accessibility Guidelines install unit with top of hook 48" [1219] maximum Above Finished Floor (AFF) if clear floor forward reach or if clear floor side reach access only is provided or 46" [1168] max AFF if side reach access over an obstruction (e.g. vanity) with reach depth greater than 10" [254] and less than 25" [635] is only provided or 44" [1118] max AFF if forward reach over an obstruction with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility install hook with centerline of mounting plate between 68" and 72" [1727 to 1829] AFF.

#### ADDITIONAL INFORMATION

### WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model: #7382-S

Revision: R2 | Issued: 11/1/2021 | Revised: 5/26/2023

Model: #/382-S Revision: R2 Issued: 11/1/2021 Revised: 5/26/2023 CSI: 10 28 13 Toilet Accessories Page: 2 of 2