



American Specialties, Inc.

Model #8204

Technical Data Sheet

Folding Shower Seat, Rectangular Padded Seat with Phenolic core – Compact 18" [457] wide ADA

Shower/Tub Accessories


MasterFormat Section 10 28 13



Scan for
Information



SUSTAINABILITY/LEED

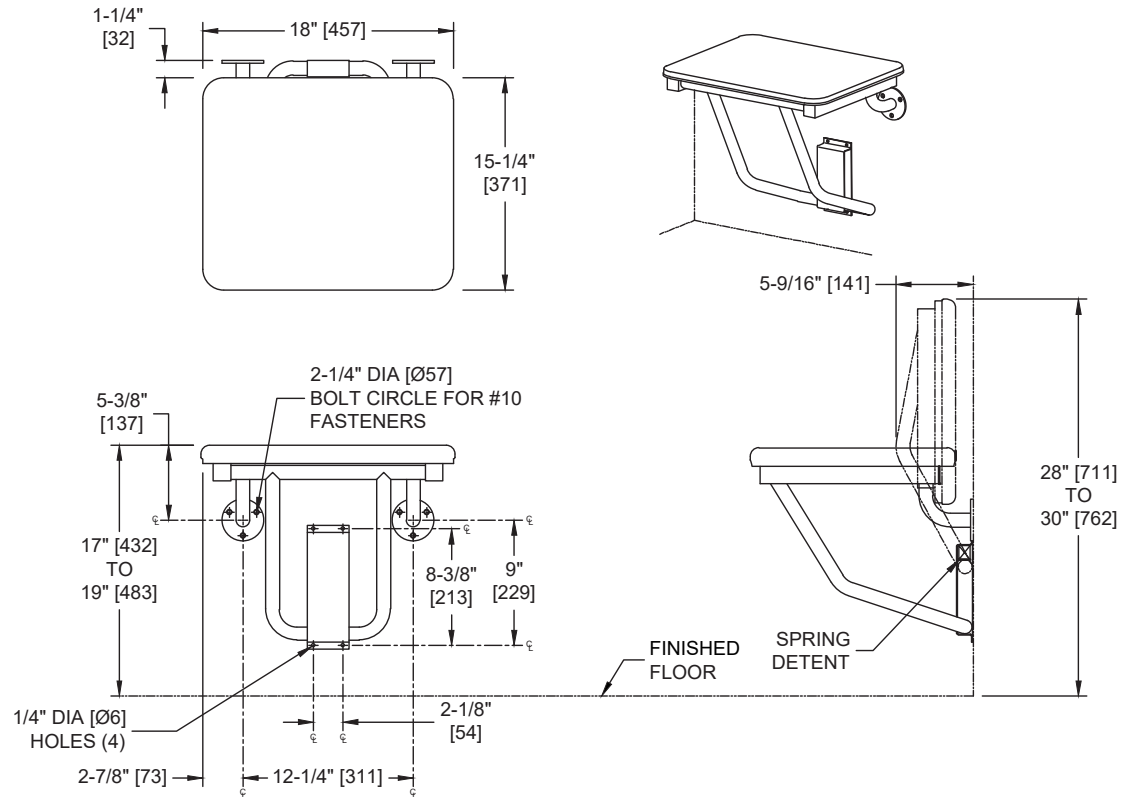

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS

PRODUCT OVERVIEW

5/16" [8] thick, one-piece, solid, padded, black core phenolic seat. Frame, support legs, flanges and bracket are type 304 satin finish stainless steel. Features a self-locking mechanism. Seat is sponge cushion covered with off-white Naugahyde® mounted on 1/2" [13] thick marine grade plywood.

KEY FEATURES & SPECIFICATIONS

- Rectangular, Compact - 18" [457] Wide - ADA Compliant
- Seat folds up when not in use - Surface Mounted - Requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival.
- Seat made w/Off-White Naugahyde Padding, on a marine grade wood.
- Support load of 250 lbs to 500 lbs maximum if installed properly
- Body made of Type 304 Stainless Steel
- 18" [457] Wide


American Specialties, Inc.
Model #8204
Technical Data Sheet

OPERATION & MAINTENANCE

Fold-up Shower Seat requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival. Guide bracket with spring detent prevents seat from dropping and provides positive support in usage position as well as spring locked storage position.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	Fold Down: 18" [457] W x 17" [432] to 19" [483] H x 15-1/4" [387] D Fold Up: 18" [457] W x 28" [711] to 30" [762] H x 15-1/4" [387] D
Construction	Seat made w/Off-White Naugahide Padding, on a marine grade wood. Body made of Type 304 Stainless Steel
Mounting	Surface Mounted
Materials	Tubes: 18 gauge (.048" [1,22] thick) type 304 stainless steel, 1" Dia. [Ø25] and 1-1/4" [32] square. Unitized all welded construction. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. Flanges: 3/16" (4.8), type 304 stainless steel. Exposed surfaces have satin finish. Edges are radiused, and burr free. Brackets: 16 gauge (.06" [1,52] thick) type 304 stainless steel. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. Seat: Closed cell medium density foam cushion covered with off-white Naugahyde® on a 1/2" [13] thick base of marine grade plywood. Seat cover top edge seam is sewn internally, laid flat and restitched for strength and smooth comfort. Bottom edge seam is tuck-and-roll construction. All seams are sewn using mildew-resistant Nylon® heavyweight thread. Bottom is fully covered and edges are tucked and concealed stainless steel stapled to base. Concealed mounting is from bottom with stainless steel screws into stainless steel inserts. Retainer: Stainless steel wire type 304 OD 27/32" [Ø21,6] coils x 2-1/4" [57.2] body length x .085" Dia. [Ø2,2] wire.

INSTALLATION

This unit is surface mounted. Installer/construction contractor must provide concealed anchor plate or blocking as specified in construction documents or as required by local building codes prior to wall finishing. Fasten unit flanges and guide bracket to concealed anchor or blocking plate with appropriate hardware. Note that concealed mounting plates or anchors and hardware are not supplied with this product and must be specified separately. Ensure that mounting configuration complies with local building codes.

CAPACITY

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc. | 441 Saw Mill River Road, Yonkers, NY 10701 | (914) 476-9000 | www.americanspecialties.com

Model: #8204

Revision: R2 Issued: 11/1/2021 Revised: 5/31/2023

CSI: 10 28 13 Toilet Accessories

Page: 2 of 2

Manufacturer reserves the right to make changes to the design, dimensions or functionality of the product without formal notice.