


American Specialties, Inc.

BERLS.COM

Model #8206-L

Technical Data Sheet

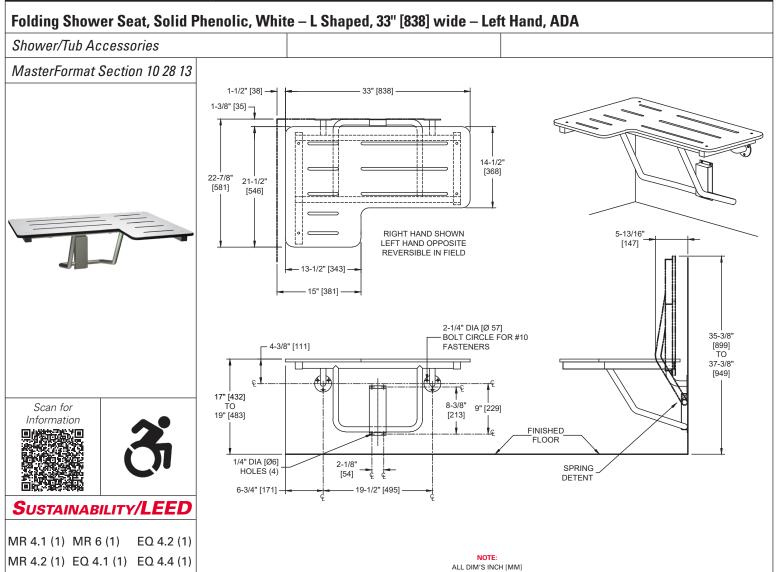

PRODUCT OVERVIEW

(Left Hand) Meets 2010 ADA Accessibility Standards and the needs of the physically disabled and elderly. Seat is 1/2" [13] thick, one piece solid, white colored, black core phenolic. Frame, support legs, flanges, and bracket are type 304 satin finish stainless steel. Phenolic seat ONLY is field reversible. Seat measures 33" [838] wide and projects 22-7/8" [581] from wall.

ILLUSTRATION FOR REF ONLY AND NTS

KEY FEATURES & SPECIFICATIONS

- L Shaped Left Handed 33" [838] Wide ADA Compliant
- Seat folds up when not in use Surface Mounted Requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival.
- Seat White Phenolic / Body Type 304 Stainless Steel
- Support load of 250 lbs to 500 lbs maximum if installed properly
- Surface Mounted
- Seat is Slotted for Drainage
- 33" [838] Wide

American Specialties,	Inc.	441	Saw I	Mill	River	Road,	Yonkers,	NY	10701 (914)	476-9000	www.a	ımericanspec	ialties.com
Model:#8206-L									Revision: R2	Issued: 11	/1/2021	Revised:	3/4/2024

CSI: 10 28 13 Toilet Accessories Revision: NZ Issued: 11/1/2021 Revised: 3/4/2024





Model #8206-L

Technical Data Sheet

OPERATION & MAINTENANCE

Fold-up Shower Seat requires only one hand operation to manually lower to horizontal position for use or raise for departure and arrival. Guide bracket with spring detent prevents seat from dropping and provides positive support in usage position as well as spring locked storage position.

Technical Information / Product Properties					
Property	Value				
Dimensions	Fold Down: 33" [838] W x 17" [432] H x 22-7/8" [581] D Fold Up: 33" [457] W x 35-3/8" [899] H x 22-7/8" [581] D				
Construction	Seat - White Phenolic / Body - Type 304 Stainless Steel Seat is Slotted for Drainage				
Mounting	Surface Mounted				
Materials	Tubes: 18 gauge (.048" [1,2] thick) type 304 stainless steel, 1" Dia. [Ø25] and 1-1/4" [32] square. Unitized all welded construction. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. Flanges: 3/16" [4,8] type 304 stainless steel. Exposed surfaces have satin finish. Edges and corners are radiused and burr free. Brackets: 16 gauge (.06" [1,52] thick) type 304 stainless steel. Exposed surfaces are satin finish. Edges and corners are radiused and burr free. Seat: Solid Phenolic 1/2" [13] x 33" [838] x 21-1/2" [546]. Exposed surfaces have semi-gloss laminate white colored top and bottom surfaces and shall have black edges. Corners are radiused and burr free. Seat top shall have three (3) slots 1/2" [13] wide x 12" [305] long for water drainage and user slip resistance. Mounting hardware is stainless steel dome head carriage bolts with acorn nuts on bottom. Spring:Stainless steel wire type 304 OD 27/32" [Ø21,6] coils x 2-1/4" [57,2] body length x .085" Dia. [Ø2,2] wire.				

INSTALLATION

This unit is surface mounted. Installer/contractor must provide concealed anchor plate or blocking as specified in construction documents or as required by local building codes prior to wall finishing. Fasten unit flanges and guide bracket to concealed anchor or blocking plate with appropriate hardware. Note that concealed mounting plates or anchors and hardware are not supplied with this product and must be specified separately. Ensure that mounting configuration complies with local building codes.

CAPACITY

WARRANTY

One (1) Year from date of Invoice

American Specialties, Inc.	441 Saw Mill River Road, Yonkers, NY	10701 (914) 476-9000	www.americanspecialties.com
Model: #8206-I		Revision: R2 Issued: 11/1	/2021 Revised: 3/4/2024

CSI: 10 28 13 Toilet Accessories Page: 2 of 2