



- Adjusts from 3" to 5½" wall thickness only

### Product Materials

**CABINET:** 18 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

**FLANGES:** 22 gauge stainless steel with exposed surfaces in architectural satin finish. Flange of one-piece seamless construction, 1" wide with ¼" return.

**DOORS:** 20 gauge stainless steel with exposed surfaces in architectural satin finish. Equipped with full-length stainless steel piano spring hinge and chrome plated brass pull knob. Doors are self-closing.

**INTER-LOCK MECHANISM:** prevents both doors from being open at same time.

**SPILL TRAY:** heavy duty, one piece, 22 gauge drawn tray designed to prevent leakage.

### Operation

Special interlock mechanism permits only one door to open at a time. Spill tray removes for cleaning.


### Installation

Verify all rough-in dimensions prior to installation. Requires rough wall opening of 11⅞"W x 10⅞"H. Adjusts to wall thickness of 3" to 5½". Remove one flange and slip unit into wall. Replace flange and secure to cabinet with concealed mounting screws (included) at holes provided. Tighten screws holding opposite flange.

### Guide Specification

Specimen pass-thru cabinet shall be fabricated of stainless steel with 20 gauge doors and all exposed surfaces in satin finish. Interlock mechanism permits operation of only one door at a time. Removable stainless steel spill tray.

Overall dimensions: 13⅜"W x 12⅞"H x 6"D.

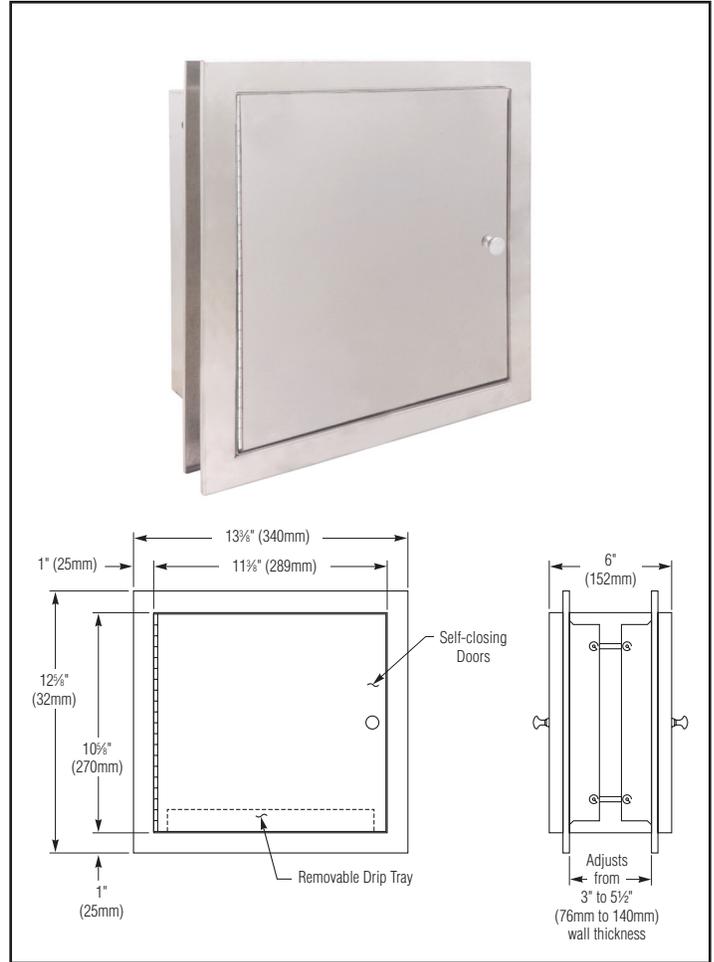

Orders composed of products indicated as **Bradex®** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1  
6/4/2014  
This information is subject to change without notice.  
Bradley\_PassThruCabinet\_9813

© 2015 Bradley  
P.O. Box 309, Menomonee Falls, WI 53052-0309  
800 BRADLEY (800 272 3539) +1 262 251 6000  
bradleycorp.com