1¼" O.D. heavy duty stainless steel grab bar with concealed mounting:

Product Materials

FLANGES: 3⅛" dia. 13 gauge stainless steel.

ESCUTCHEONS: 22 gauge stainless steel. One-piece drawn construction with exposed surfaces in architectural satin finish. Snap over flanges to conceal mounting screws.

TUBING: 1¼" O.D. 18 gauge stainless steel, seamless construction with exposed surfaces in architectural satin finish. Bent ends of tubing pass thru the flanges and are welded for maximum strength. Intermediate supports are contour cut and joined by welding to form an integral part of the grab bar. All welds ground and polished to blend. Mandrel bending process maintains uniform bar diameter. Return provides 1½" standard safety clearance between wall and bar.

Strength

When properly mounted, all Bradley heavy duty grab bar systems meet or exceed the requirements of ANSI Standard A117.1, the ADA and ABA Accessibility Guidelines for Buildings and Facilities (ADAAG), and the Uniform Federal Accessibility Standard (UFAS). Select dimensions of configurations are 3rd party tested to support up to 900 pounds. See configurations on following page. All other 832 grab bars outside of these parameters are rated to support up to 250 pounds. Wall must be reinforced in the area of the grab bar in order to support the load it is intended to support.

Guide Specification

Grab bar shall be fabricated of satin finish stainless steel with concealed mounting flanges in sizes and configurations as indicated. Install with Bradley Mounting Kits as indicated.

Installation

For instructions on installation, warnings and maintenance, please visit www.bradleycorp.com.

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

Optional Features

Features		Suffix
○	Safety-grip finish	-2
○	High-polish finish	-4
○	Safety grip with high-polished finish	-7

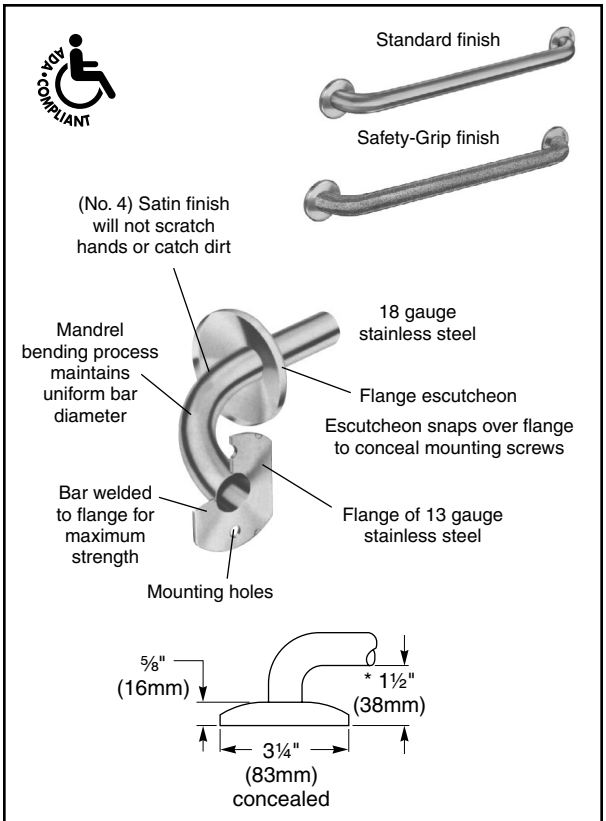

* 1½" wall clearance required under most building design codes

Bradex® Models

Configuration Number	Shipping Data	
	Cu. Ft.	Wt. Lbs.
001-18"	0.14	2
001-24"	0.14	2
001-36"	0.15	3
001-42"	0.15	4
001-48"	0.25	4
055**	1.15	4

NOTE: These units must ship via common carrier.
Bradex® only in safety grip.
** 055 24" x 24" with 120° Angle Standard Dimension.

Orders composed of products indicated as Bradex® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

This information is subject to change without notice.

© 2021 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

Configuration Information

	OD	1-1/4"
	Rating (LBS)	900
Configuration Number	Grab Bar Length	832 Series
001-12	12"	X
001-18	18"	X
001-24	24"	X
001-36	36"	X
001-48	48"	X
059/058	up to 42" x 54"	X
057	30" x 30"	X

WARNING **Only models/configurations listed on this page have been rated for use up to 900 pounds. Please see Grab Bar Configurations on bradleycorp.com for all other available configurations.**

Bradex® Item - Standard Finish

Bradex® Item - Standard Finish or Safety Grip Finish (-2)

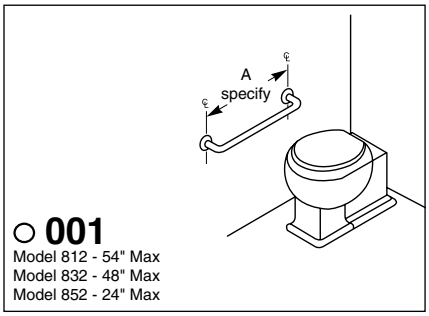

○ **001**
Model 812 - 54" Max
Model 832 - 48" Max
Model 852 - 24" Max



○ **058**
(LH) "B" side will have stand-off.
(Note: Series 817 and 837 versions of this configuration are reversible and should be ordered as 059 configuration.



○ **059**
Opposite **058** (RH) "B" side will have stand-off.



○ **057**
30" x 30"

Orders composed of products indicated as ***Bradex®*** will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

This information is subject to change without notice.

© 2021 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

800 Series
Grab Bar Applications

Typical Water Closet Applications:



□ 001
Specify length desired. See **048** and **049** for 45° mounting. **001** over 54" requires a center support and becomes **002**.



□ 002



□ 003
Only one end return. Special size "A" dimensions; center post will only be added to models greater than 24".



□ 004



□ 005
"A" dimension will always have stand-off (LF).



□ 006
Opposite **005.**
"A" dimension will always have stand-off (RH).



□ 010
(LH)



□ 011
Opposite **010** (RH)

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

This information is subject to change without notice.

© 2019 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

Typical Water Closet Applications:

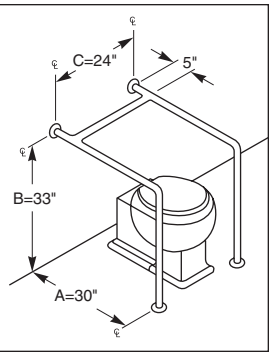

□ 012
Confirm clearance between fixture or plumbing and grab bar in individual applications.



□ 039
‡ Bar slides to accommodate various size water closets. Flat bar 2" wide x ⅛" thick, 11 gage, bolts to toilet.



□ 039-1
‡ Bar adjustable for right- or left-hand mounting.

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

© 2019 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

800 Series
Grab Bar Applications

Typical Water Closet Applications:

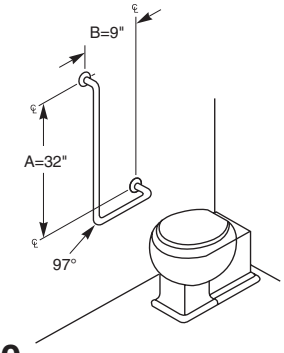

□ 040
(LH)

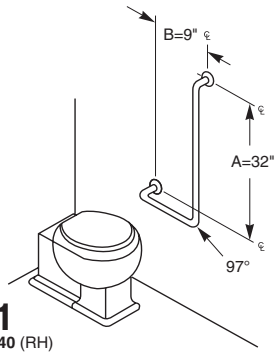

□ 041
Opposite **040** (RH)



□ 054
30" x 33"
NOTE: 1" not available for this application.

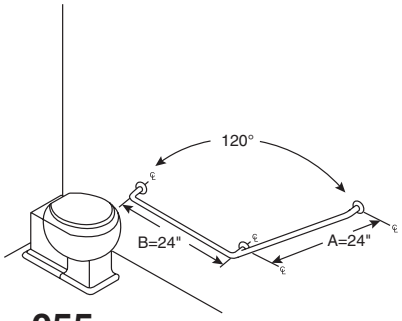

□ 055
24" x 24"



□ 056
18" x 33"



□ 057
30" x 30"



□ 058
(LH) "B" side will have stand-off.
(Note: Series 817, 837 and 857 versions of this configuration are reversible and should be ordered as 059 configuration.



□ 059
Opposite **058**
(RH) "B" side will have stand-off.

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

This information is subject to change without notice.

© 2018 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

Typical Water Closet Applications:



□ **115**
(LH)



□ **116**
Opposite **115** (RH)



□ **117**
Confirm clearance between fixture or plumbing and grab bar in individual applications.



□ **118**
Confirm clearance between fixture or plumbing and grab bar in individual applications.



□ **119**
(shown) (LH)
Confirm clearance between fixture or plumbing and grab bar in individual applications.



□ **120**
Opposite **119** (RH)

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

© 2018 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

Typical Shower Applications:

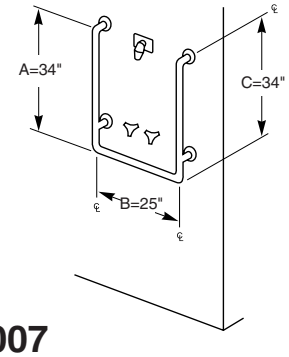

□ **007**

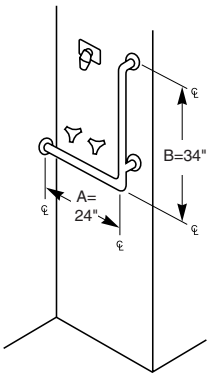

□ **032**
(RH)

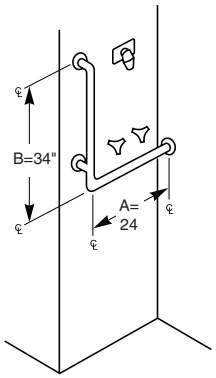

□ **033**
Opposite **032** (LH)

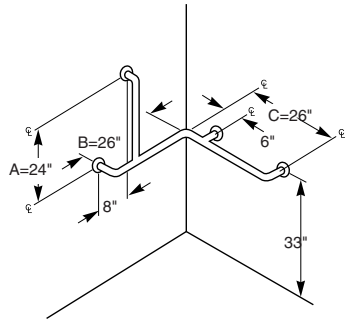

□ **034**
(LH)



□ **035**
Opposite **034** (RH)

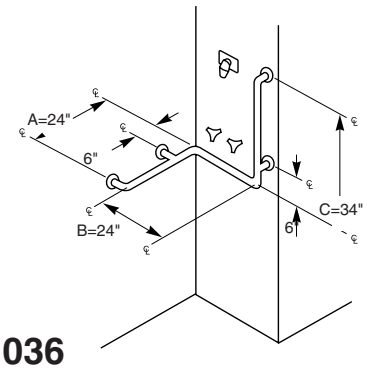

□ **036**
(RH)

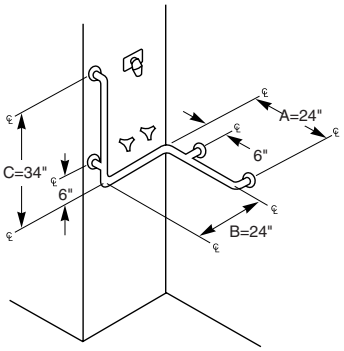

□ **037**
Opposite **036** (LH)

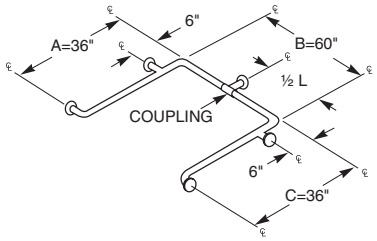

□ **060**
This configuration ships in two pieces which are joined at the coupling. This configuration can ship via UPS.

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

© 2015 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115

Typical Tub Applications:



□ **021**

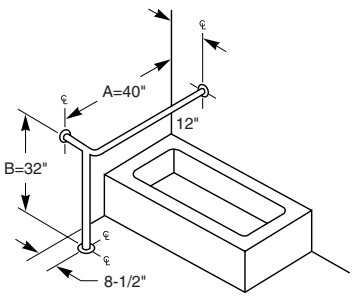

□ **022**
(LH)

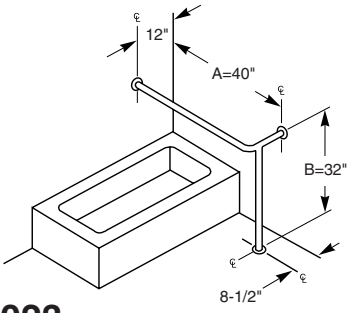

□ **023**
Opposite **022** (RH)



□ **024**

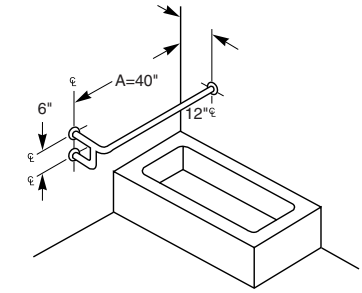

□ **026**
(LH)

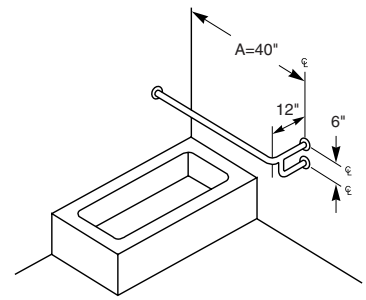

□ **027**
Opposite **026** (RH)



□ **030**
(RH)

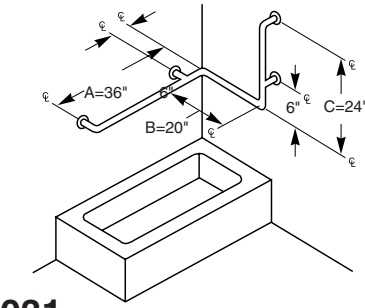

□ **031**
Opposite **030** (LH)

ADA Compliant

- ☑ Consult local and national accessibility codes for proper installation guidelines.
- ☑ Conformity and compliance to local and national codes is the responsibility of the installer.

NOTE: When Grab Bar dimensions are modified, a support will be added to all sections longer than 54".

© 2015 Bradley

P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (704) 937-2673 129 Oakpark Drive, Unit A, Mooresville, NC 28115