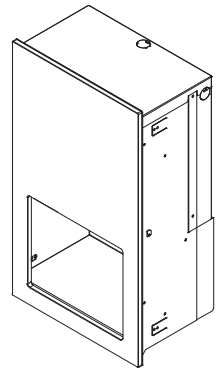
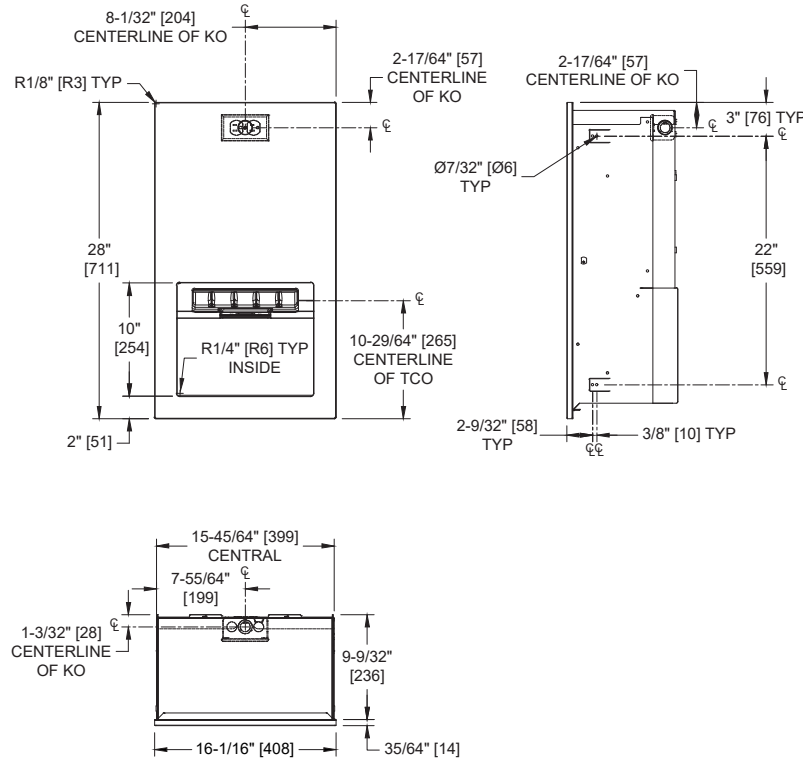


**American Specialties, Inc.****Model #645210AC-00****Technical Data Sheet****PIATTO™ COMPLETELY RECESSED AUTOMATIC ROLL PAPER TOWEL DISPENSER – AC Power – White Phenolic Door***Paper Towel Dispensers**Piatto**MasterFormat Section 10 28 13*Scan for  
Information**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

**NOTE:**

ALL DIM'S INCH [MM]  
ILLUSTRATION FOR REF ONLY AND NTS  
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN  
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

**PRODUCT OVERVIEW**

This sophisticated automatic paper towel dispenser is designed to be completely recessed into the plane of the washroom wall, highlighting the seamless design that defines Piatto™. The phenolic door is attached to the cabinet using field-adjustable, furniture quality hinges and is secured shut by an internal spring-loaded latch. All hardware is concealed giving the Piatto™ Collection its minimalist appeal. Proximity sensing no-touch unit holds and dispenses one 8" Ø203 diameter x 8" wide [203] standard towel roll standard towel roll up to 800 ft. (244m) long and one 8" wide [203] stub roll up to 4" diameter Ø102 and automatically changes over to main roll when finished with stub roll when feed tabs are properly engaged. Dispenser is powered by AC plug-in adapter – C-UL-US and CE approved internal low-voltage adapter (supplied) using 110- 240VAC, 50/60 Hz and providing output of 5VDC @ 1A and operates automatically to activate towel dispensing when hands are placed in sensor zone. At each activation unit feeds out a length of towel selected by owner by setting length, delay and paper saver switches.

**KEY FEATURES & SPECIFICATIONS**

- Designed to be completely recessed with no protrusion from the wall at all
- White phenolic door unique to Piatto™ adds elegance
- Furniture style hinges are field adjustable to ensure perfect fit - All metal parts are made of Type 304 Stainless Steel
- All metal parts are made of Type 304 Stainless Steel
- All hardware, including the latch, is concealed
- Automatic - AC Operated - "No Touch"
- Fits with virtually no gap into a finished wall opening


**American Specialties, Inc.**
**Model #645210AC-00**
**Technical Data Sheet**

## **OPERATION & MAINTENANCE**

Push self-closing disposal door to deposit waste material. Doors operate independently and may be used simultaneously. Seat covers are self-feeding until supply is depleted. Toilet paper rolls feed freely until depleted and level of supply is constantly visible for low-level warning. Waste receptacle is emptied manually on cycle determined by maintenance needs. Toilet paper rolls, paper seat covers and waste receptacle are serviced by unlocking and opening door. Locked door prevents inadvertent dumping and unauthorized removal. Waste container safety-edged finger hole provides convenient grip for service. Toilet paper spindles are carried in vandal resistant sub-frame accessible when door is opened. Barrier baffle panels preserve privacy between stalls at all times.

## **TECHNICAL INFORMATION / PRODUCT PROPERTIES**

| Property     | Value                                                                                                                      |
|--------------|----------------------------------------------------------------------------------------------------------------------------|
| Dimensions   | 16-1/16" [408] x 28" [711] H x 9-13/16" [248] D                                                                            |
| Construction | Type 304 Stainless Steel Frame w/ White Phenolic Door<br>Furniture style hinges are field adjustable to ensure perfect fit |
| Power        | 110-240V AC                                                                                                                |
| Operation    | Automatic "No-Touch"                                                                                                       |
| Mounting     | Concealed Mounting                                                                                                         |
| Capacity     | Fits with virtually no gap into a finished wall opening                                                                    |

## **INSTALLATION**

Mount unit in partition using #10 x 3/4" self-threading Philips oval head screws (supplied). Holes in flanges are offset to prevent screw interference. Install unit so that top of face trim is 57" [1448] to 61" [1549] above finished floor (AFF).

\*Note: partition cutout is 7/8" [22] below top of face trim.

## **WARRANTY**

One (1) Year from date of Invoice