

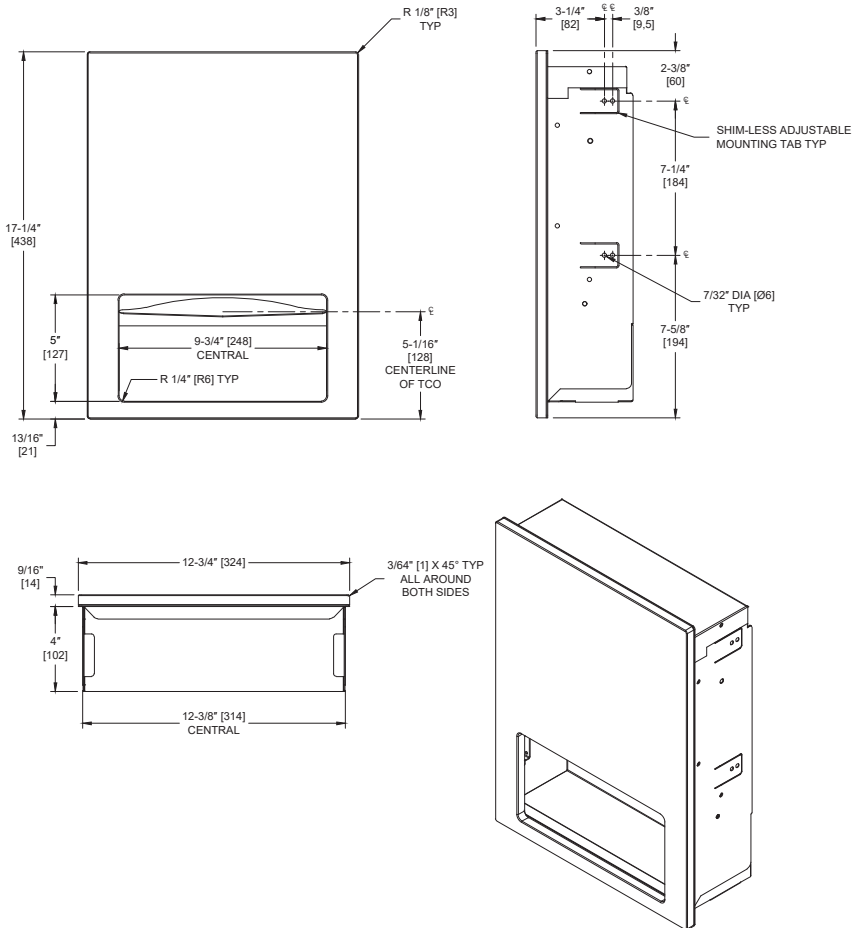

American Specialties, Inc.
Model #6457-00
Technical Data Sheet
PIATTO™ COMPLETELY RECESSED PAPER TOWEL DISPENSER – White Phenolic Door
Paper Towel Dispensers
Piatto
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)



NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

This sophisticated paper towel dispenser cabinet is designed to be completely recessed into the plane of the washroom wall, highlighting the seamless design that defines Piatto™. The phenolic door is attached to the cabinet using field-adjustable, furniture quality hinges and is secured shut by an internal spring-loaded latch. All hardware is concealed giving the Piatto™ Collection its minimalist appeal. Well-suited for the smaller washroom with less space and traffic, this unit dispenses 350 C-fold or 475 multi-fold paper towels. Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly.

KEY FEATURES & SPECIFICATIONS

- Designed to be completely recessed with no protrusion from the wall at all
- White phenolic door unique to Piatto™ adds elegance
- Furniture style hinges are field adjustable to ensure perfect fit - All metal parts are made of Type 304 Stainless Steel
- All metal parts are made of Type 304 Stainless Steel
- All hardware, including the latch, is concealed
- Manual
- Fits with virtually no gap into a finished wall opening

**American Specialties, Inc.****Model #6457-00****Technical Data Sheet****OPERATION & MAINTENANCE**

Towels are self-feeding until supply is depleted. Unit may be reloaded with a partial load in-place and will continue to feed properly. Locking door prevents unauthorized access or removal.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	12-3/4" [324] W x 17-1/4" [438] H x 4-9/16" [116] D
Construction	Type 304 Stainless Steel Frame w/ White Phenolic Door Furniture style hinges are field adjustable to ensure perfect fit
Power	N/A
Operation	Manual - Pull Type
Mounting	Concealed Mounting
Capacity	Fits with virtually no gap into a finished wall opening

INSTALLATION

Mount unit in wall recess using four (4) #10 x 1-1/2" [M5x38] self-threading Pan Head screws (by others) through concealed mounting holes provided in Shim-less adjustable mounting tabs. For compliance with 2010 ADA Accessibility Standards install unit so that towel dispenser outlet is 48" [1219] maximum above finished floor (AFF). For general utility mount unit 50" [1268] AFF to bottom of unit. See OM & IG for complete installation instructions packed with unit.

Finished Wall Opening (FWO) required is 12-13/16" [325] W x 17-5/16" [440] H x 4-3/4" [121] D minimum

WARRANTY

One (1) Year from date of Invoice