

PRODUCT SPECIFICATIONS

Elkay® Pro Filtration™ VR Bottle Filling Station & Bi-Level ADA Cooler w/ Ultra Capacity Lead Filter - SS. Features shall include Alcove Light, Automatic Filter Flush, Automatic Filter Status Reset, Energy Savings, Filtered, Green Ticker™, Hands Free, Laminar Flow, Pro Filtration System, Real Drain, Stainless Steel Alcove, Top Mount Quick Filter Change, Visual Filter Monitor, Cloud Connected Device, Vandal Resistant, Tempered Glass Display Cover. Furnished with Vandal Resistant bubbler. Electronic Bottle Filler Sensor with Mechanical Front Bubbler Button activation. Product shall be Wall Mount (On Wall), for Indoor applications, serving 2 station(s). Unit shall be certified to UL 399 and CAN/CSA C22.2 No. 120.

Special Features:

Alcove Light, Automatic Filter Flush, Automatic Filter Status Reset, Energy Savings, Filtered, Green Ticker™, Hands Free, Laminar Flow, Pro Filtration System, Real Drain, Stainless Steel Alcove, Top Mount Quick Filter Change, Visual Filter Monitor, Cloud Connected Device, Vandal Resistant, Tempered Glass Display Cover

Finish: Stainless Steel (S)

Power: 115V/60Hz

Bubbler Style: Vandal Resistant

Activation by: Electronic Bottle Filler Sensor with Mechanical Front Bubbler Button

Mounting Type: Wall Mount (On Wall)

Chilling Capacity: Non-refrigerated

Full Load Amps 1

Rated Watts: 5

Dimensions (L x W x H): 36-3/4" x 19" x 46-7/8"

Approx. Shipping Weight: 88 lbs.

Installation Location: Indoor

No. of Stations Served: 2

Special Note: plumbSMART Gateway and Account required for cloud connection. VERSATILEPRO accessory required to install bottle filler on left side.



Included with Product:

**Bottle Filler,
Water Cooler,
Ultra Capacity Filter**

Ships in one box.

A Century of Tradition and Quality. For more than 100 years, Elkay has been making innovative products and providing exceptional customer care. We take pride in offering plumbing products that make life easier, inspire change and leave the world a better place.



PRODUCT COMPLIANCE

ADA & ICC A117.1

ASME A112.19.3/CSA B45.4

CAN/CSA C22.2 No. 120

FCC & ISED

NSF/ANSI 42, 53, 61 (Q≤1), 372 (lead free), & 401

UL 399



Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards. Installation may require additional components and/or construction features to be fully compliant. Consult the local Authority Having Jurisdiction if necessary.

[Installation Instructions \(PDF\) - 2000002952](#)

Electrical components and water system are warranted for 12 months from date of installation. **Warranty pertains to drinking water applications only. Non-drinking water applications are not covered under warranty.**

[Warranty \(PDF\)](#)

PART: _____ QTY: _____

PROJECT: _____

CONTACT: _____

DATE: _____

NOTES: _____ APP _____

ROVAL: _____

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



Model LVRCTLDWSPRO

Elkay® Pro Filtration™ VR Bottle Filling Station & Bi-Level ADA Cooler w/ Ultra Capacity Lead Filter - SS

TAG

Features		
•	Certified Filtration: Certified by IAPMO R&T to NSF/ANSI 42, 53 and 401 to reduce lead, microplastics, cysts, asbestos, turbidity, particulate class 1, chlorine, and taste and odor, and to NSF/ANSI/CAN 372 for lead free compliance	
•	Top-Access Filter Replacement: Change filters in seconds from the top- minimizing maintenance time and system disruption	
•	High Capacity Filtration: Delivers filter life capacity that exceeds industry standards, with options up to 20,000 gallons- extending uptime and reducing filter changeouts	
•	Smart Connected: Remotely track filter status, anticipate maintenance, flush the unit, and monitor bottles saved for sustainability insights	
•	Automated Filter Startup: Recognizes new filters, automatically resets status lights, and flushes the waterway- reducing installation time and labor	
•	Interactive Display: Blue LCD display shows remaining filter capacity and 20oz bottles saved - helping teams stay ahead of maintenance and avoid unplanned downtime	
•	10,000-gallon ultra filter capacity helps extend uptime and reduce maintenance frequency— ideal for high-traffic environments	
*VERSATILEPRO add-on kit to move bottle filler to left side.		

Optional Accessories


FL6	Elkay Pro Filtration® High-Capacity Lead + Microplastics 6000 gal. Filter	Spec Sheet (PDF)
FLP4	Elkay Pro Filtration® Total PFAS* + Lead + Microplastics 4000 gal. Filter	Spec Sheet (PDF)
FL10	Elkay Pro Filtration® Ultra-Capacity Lead + Microplastics 10000 gal. Filter	Spec Sheet (PDF)
FSR5	Elkay Pro Filtration® Stage 1 Sediment Prefilter	Spec Sheet (PDF)
ZGW-LORA-W1-LTE	Zurn Gateway for Connected Enabled Products	Spec Sheet (PDF)
LKAPRVRS	Cane Apron for LVRC Pro Stainless Steel	Spec Sheet (PDF)
STLBFUP-PRO	Back Panel Assembly Kit for Bi-level Coolers with Elkay Pro Filtration Bottle Filler	Spec Sheet (PDF)
STLRBFUP-PRO	Reverse Back Panel Assembly Kit for Bi-level Coolers with Elkay Pro Filtration Bottle Filler	Spec Sheet (PDF)
MLP200	In-wall Carrier for Bi-level On-wall Bottle Fillers Coolers & Fountains	Spec Sheet (PDF)
VERSATILEPRO	Cable Extension for Versatile Elkay Pro Filtration Bottle Filler	Spec Sheet (PDF)

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](#) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

Model LVRCTLDWSPRO

Elkay® Pro Filtration™ VR Bottle Filling Station & Bi-Level ADA Cooler w/ Ultra Capacity Lead Filter - SS

TAG

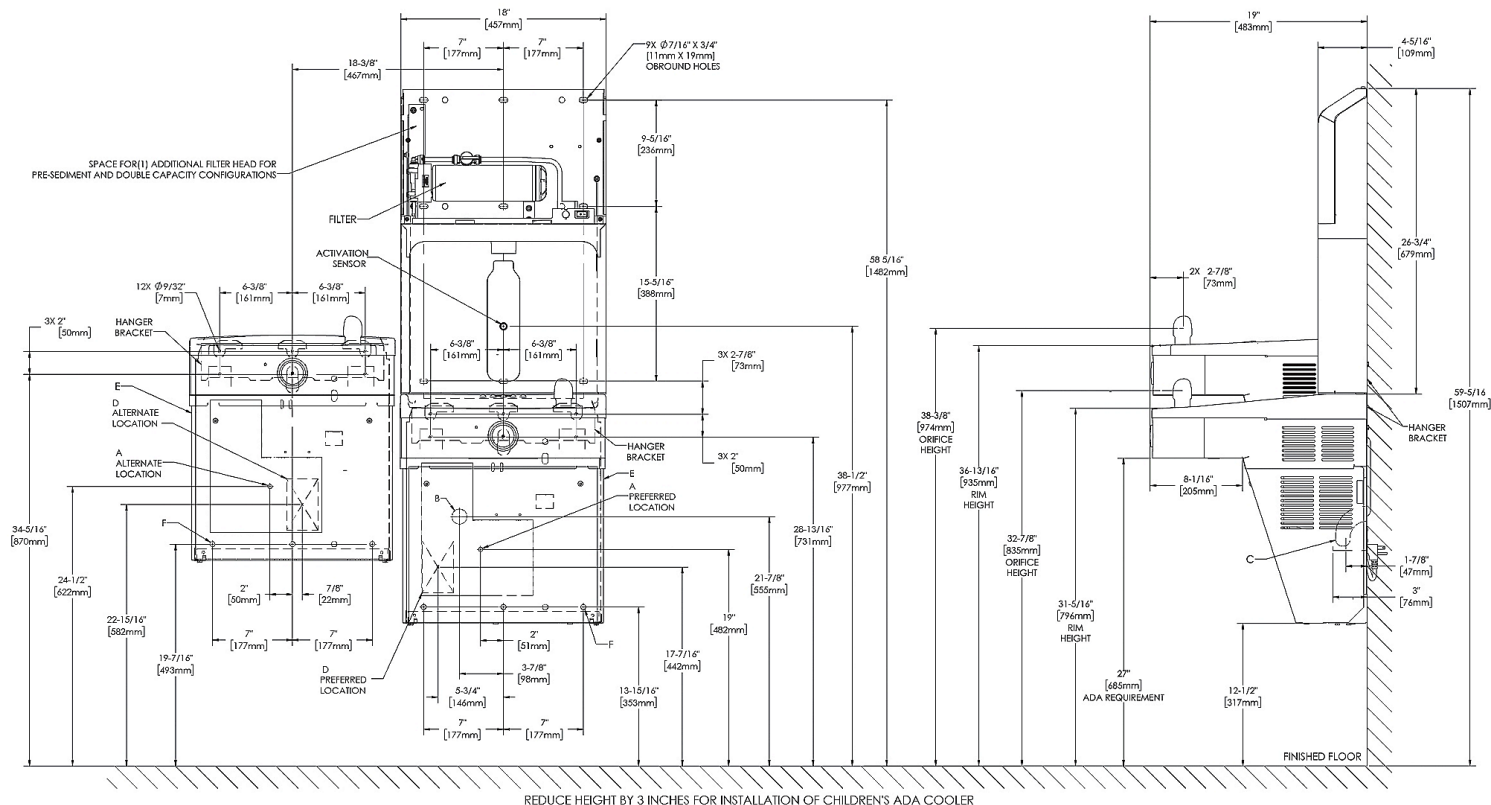

LEGEND:

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube. Up to 3" (76mm) maximum out from wall.

B = Recommended Waste Outlet location. To accommodate 1-1/4" nominal drain. Drain stub 2" (51mm) out from wall.

C = 1-1/4" Trap (not furnished).

D = Electrical Supply (3) Wire Recessed Duplex Outlet**.


E = Ensure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.

F = 7/16" (11mm) Bolt Holes for fastening unit to wall.
††Note: New Installation Must Use Ground Fault Circuit

*Note: New Installation Must Use Ground Fault Circuit Interrupter (GFCI).
Note: It is highly recommended that the circuit be dedicated and the load

Note: It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

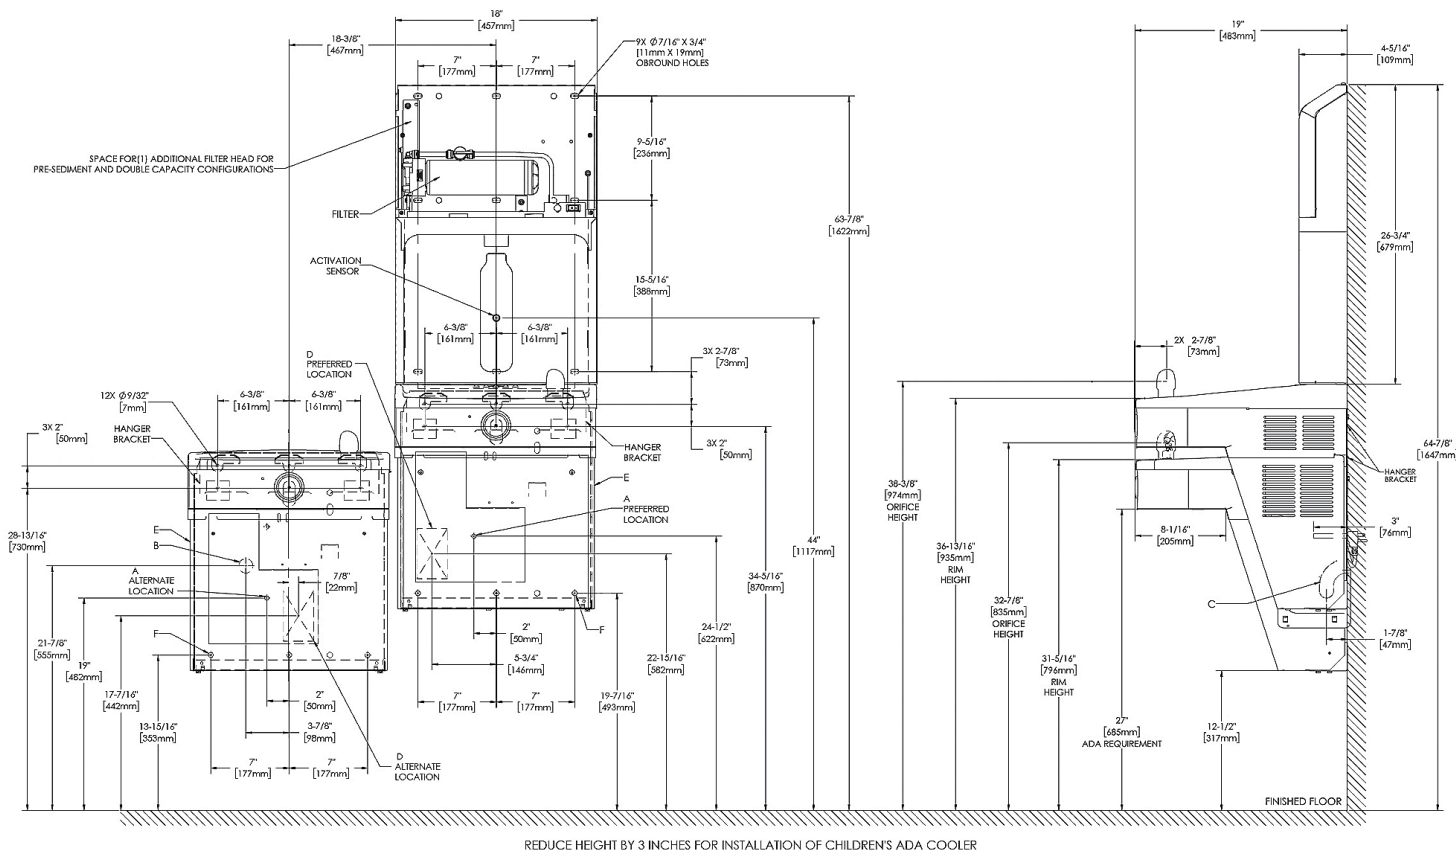


LEGEND:

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8" O.D. ungalvanized copper tube. Up to 3" (76mm) maximum out from wall.
 B = Recommended Waste Outlet location. To accommodate 1-1/4" nominal drain. Drain stub 2" (51mm) out from wall.
 C = 1-1/4" Trap (not furnished).
 D = Electrical Supply (3) Wire Recessed Duplex Outlet**.
 E = Ensure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.
 F = 7/16" (11mm) Bolt Holes for fastening unit to wall.
 **Note: New Installation Must Use Ground Fault Circuit Interrupter (GFCI).
 Note: It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

NOTE: VERSATILEPRO ADD-ON KIT IS REQUIRED TO
INSTALL BOTTLE FILLER ON THE LEFT-HAND SIDE.

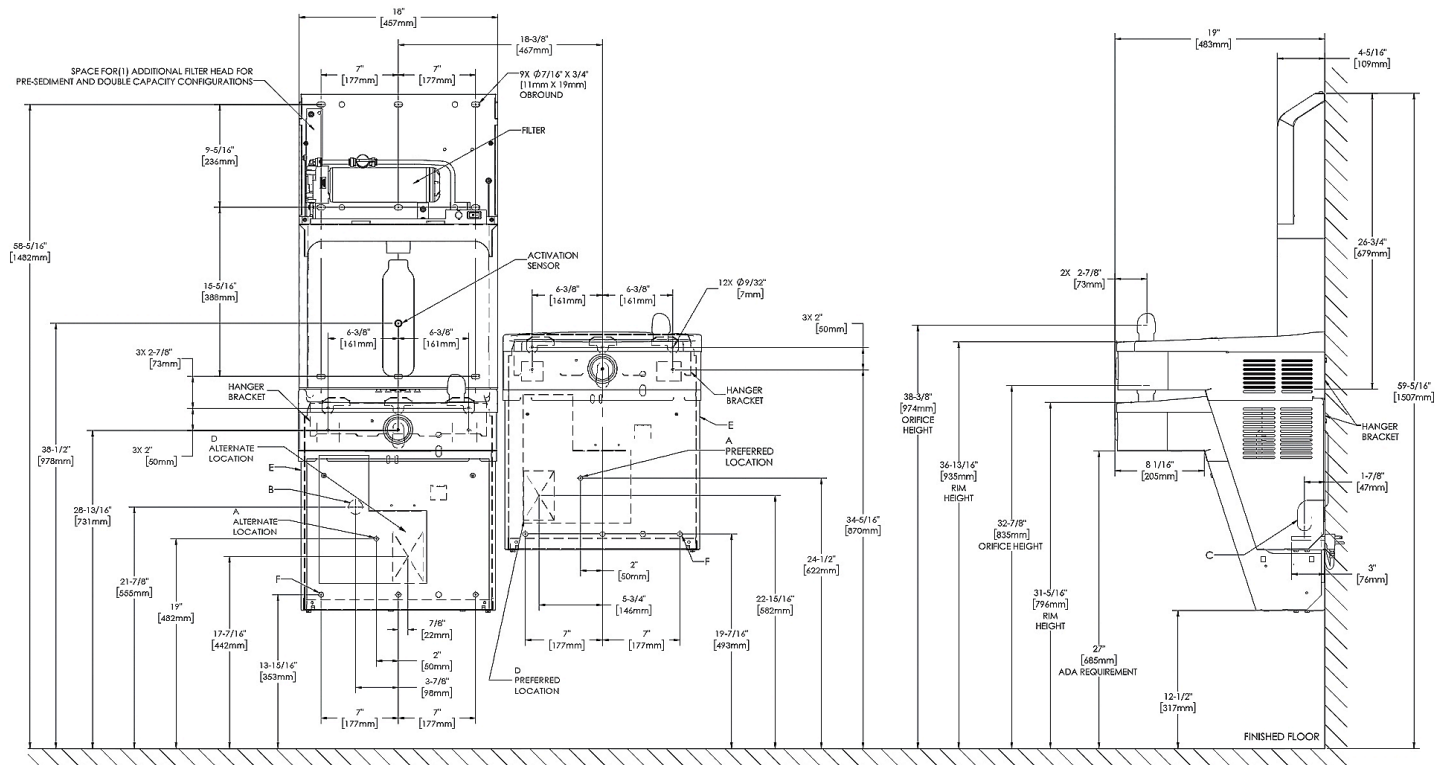

REDUCE HEIGHT BY 3 INCHES FOR INSTALLATION OF CHILDREN'S ADA COOLER

LEGEND:

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8" O.D. unplated copper tube. Up to 3" (76mm) maximum out from wall.

B = Recommended Waste Outlet location. To accommodate 1-1/4" nominal drain. Drain stub 2" (51mm) out from wall.

C = 1-1/4" Trap (not furnished).

D = Electrical Supply (3) Wire Recessed Duplex Outlet**.

E = Ensure proper ventilation by maintaining 6" (152mm) minimum clearance from cabinet louvers to wall.


F = 7/16" (11mm) Bolt Holes for fastening unit to wall.

**Note: New Installation Must Use Ground Fault Circuit Interrupter (GFCI).

Note: It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

NOTE: VERSATILEPRO ADD-ON KIT IS REQUIRED TO
INSTALL BOTTLE FILLER ON THE LEFT-HAND SIDE.

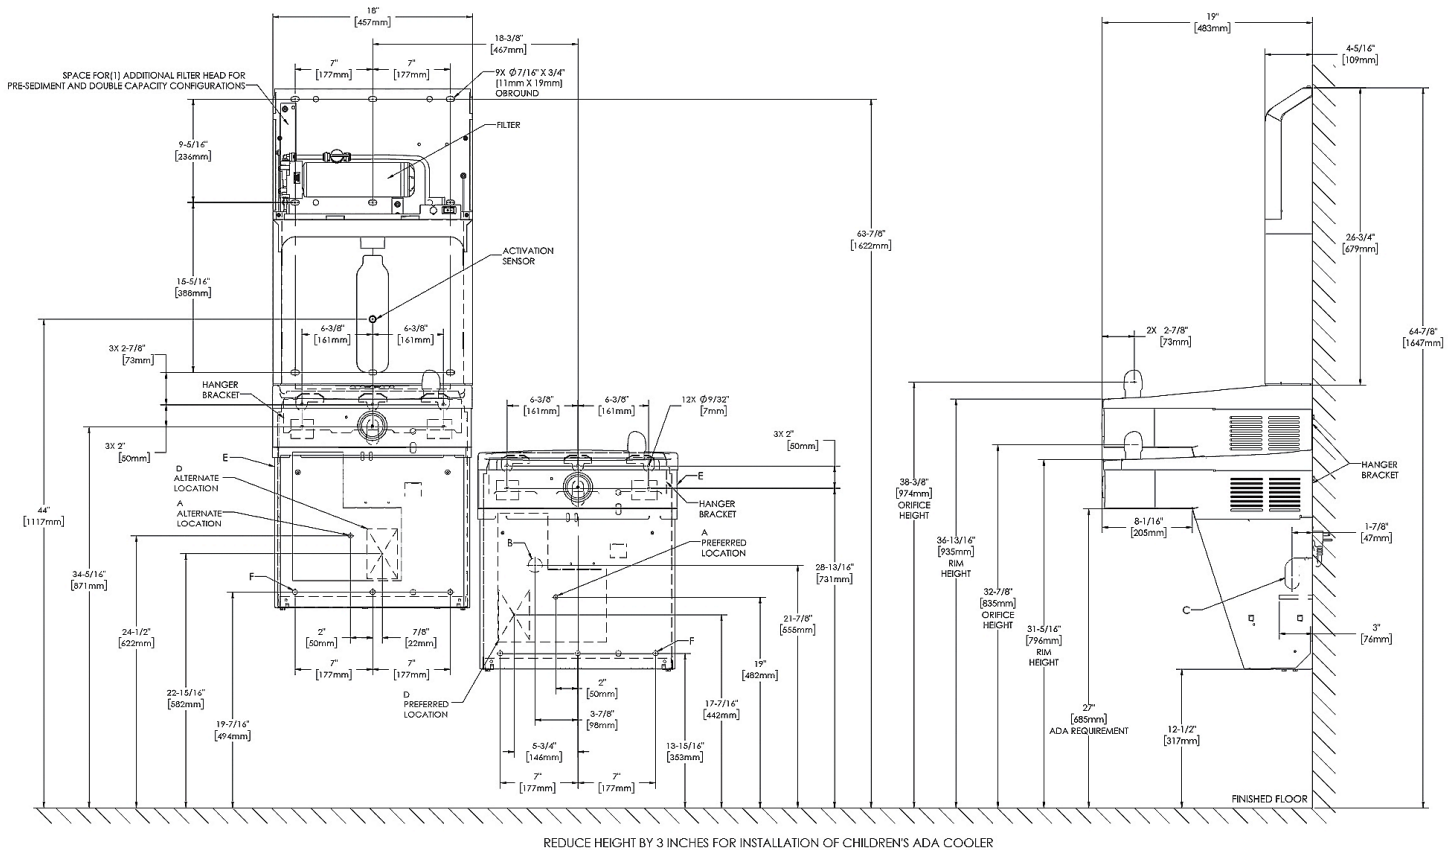

LEGEND:

A = Recommended Water Supply location. Shut-off Valve (not furnished) to accept 3/8\" O.D. unplated copper tube. Up to 3\" (76mm) maximum out from wall.
B = Recommended Waste Outlet location. To accommodate 1-1/4\" nominal drain. Drain stub 2\" (51mm) out from wall.

C = 1-1/4\" Trap (not furnished).

D = Electrical Supply (3) Wire Recessed Duplex Outlet**.

E = Ensure proper ventilation by maintaining 6\" (152mm) minimum clearance from cabinet louvers to wall.

F = 7/16\" (11mm) Bolt Holes for fastening unit to wall.

**Note: New Installation Must Use Ground Fault Circuit Interrupter (GFCI).

Note: It is highly recommended that the circuit be dedicated and the load protection be sized for 20 amps.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkay.com for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.