

REGAL® MANUAL FLUSHOMETER REGAL 186-0.25-XL

#### **CODE NUMBER**

30826001

#### **DESCRIPTION**

0.25 gpf, XL Sweat Solder Adapter Kit, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, Regal® Exposed Manual Urinal Flushometer.

#### **DETAILS**

Flush Volume: 0.25 gpf (0.9 Lpf)Finish: Polished Chrome (CP)

• Valve: Diaphragm

• Valve Body Material: Semi-red Brass

• Fixture Type: Urinal

• Fixture Connection: Top Spud

• Rough-In Dimension: 11 ½" (292mm)

Spud Coupling: <sup>3</sup>/<sub>4</sub>" (19mm)
Supply Pipe: <sup>3</sup>/<sub>4</sub>" (19mm)

• Adapter: XL Sweat Solder Adapter Kit (XL)

#### **FEATURES**

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling Wall and Spud Flange for 3/4" Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop



### **COMPLIANCES & CERTIFICATIONS**





























(ADA Compliant, BAA Compliant, BABAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, cUPC Certified, cUPC Green Certified, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, LEED Materials & Resources EPD Credit, LEED V4 Water Efficiency Credit, Satisfies LEED Credits, UPC Certified, WaterSense Listed)

## RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi- Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

## **VALVE OPERATING PRESSURE (FLOWING)**

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

#### **DOWNLOADS**

- Regal XL Exposed Installation Instructions
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Regal Flushometers Repair and Maintenance Guide
- Flushometer Pressure gauges
- Additional Downloads

## **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the REGAL 186 product? View the general spec sheet with all options.

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com






REGAL 8 MANUAL FLUSHOMETER REGAL 186-0.25-XL

WaterSense compliant when used with a WaterSense compliant fixture

# WARRANTY

View Warranty Information

## **ROUGH-IN**

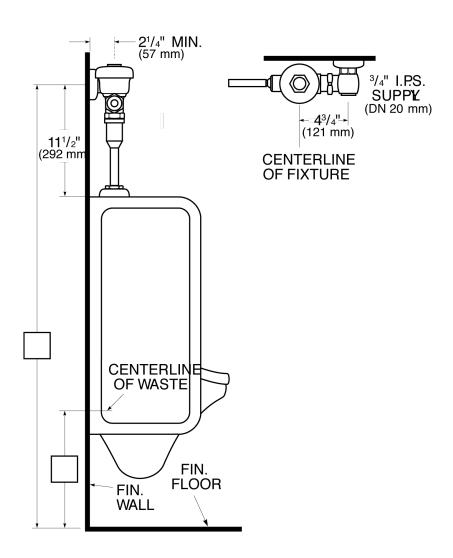

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com