

DropSpot™ Bottle Filler & Water Cooler

DRS125-FCT

Product description

DropSpot™ On-wall Bi-level Cooler.

Compliances & Certifications

ASME, cULus LISTED, cUPC, FC, filter first, IAPMO MEMBER, NSF-42, NSF/ANSI/CAN 61 cUPC, NSF-372, NSF-401, cULus LISTED

(ASME A112.18.1 Compliant, FCC Compliant, IAPMO, IAPMO Water, IAPMO listed ASME, IGC 115, IGC 226, Meets Canada OBC and QBC, Michigan Filter First, Filter listed to (NSF-42, NSF-53, NSF-401), NSF-61/CAN-61, NSF-372 Lead Free, NSF-401, AB100, NSF/ANSI/CAN 61: Q ≤ 1.0, TAS, UL 399/CSA C22.2 No.120, UL Certified (US and Canada), cUPC Certified)

Code 33820080

Finish

304 Stainless Steel (SS)

Downloads

- DRS120_DRS125 Refrigerated Bi-level Cooler Installation Instructions.pdf
- DRS120_DRS125 Unrefrigerated Bi-level Cooler Installation Instructions.pdf
- FA3000 DRS110_115_120_125 Drop Down Filter Assembly Installation Instructions.pdf
- FC3000 Replacement Water Filter Cartridge Installation Instructions.pdf
- DropSpot Bottle Fillers and Water Coolers Brochure.pdf
- DropSpot™ Care and Cleaning Guide.pdf
- Additional Downloads

Videos

- Sloan DropSpot™ Bottle Fillers and Water Coolers
- Sloan DropSpot™ Bottle Fillers and Water Coolers Now at Wrigley Field

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

BERL'S COMMERCIAL SUPPLY BERLS.COM (800) 409-3131

Details

- Mounting: On-wall
- Configuration: Bi-level Cooler
- Filter Option: Filtered (FIL)
- Refrigeration Option: Refrigerated (REF)
- Finish: 304 Stainless Steel (SS)
- Chilling Capacity: 8.0 gph (30.3 Lph)
- Full Load Amps: 5.3
- Installation Location: Indoor
- Stations Served: 2
- Bubbler Flow Rate: 0.3 gpm (1.1 Lpm)

Features

Sloan Bi-Level Cooler is available in both Stainless and Black, filtered and unfiltered, refrigerated and unrefrigerated options.

- Antimicrobial bubbler, push bar, and other components
- ADA compliant when installed properly
- Rough-in matches other manufacturers' recommended rough-in locations for easy replacement
- Drop-down door assembly provides easy access to filter
- Patent pending push bar designed to be activated at any touch point and to provide easy access for cartridge replacement
- Effectively reduces Total PFAS, lead, microplastics, cysts, Particulates Class 1, and chlorine

Recommended specifications

Sloan's DropSpot™ On-wall Bi-level Cooler Filtered Refrigerated Stainless. Chilling capacity of 8.0 gph of 50F drinking water, based on 80F inlet water and 90F ambient. Unit shall be activated from an antimicrobial front pushbar using less than 5 pounds of force. Bubbler shall deliver a 0.3 gpm flow. Basin and cabinet shall be constructed from 304 stainless steel with satin finish. Push bar shall be activated by any touch point on the bar and shall be opened by Sloan access key. Filter drop-down assembly shall be opened by Sloan access key. Filter used in the unit shall have capacity of 3000 gallons at a minimum, and shall reduce Total PFAS, lead, microplastics, cysts, Particulates Class 1, and chlorine.

Power

- (Standard) 115VAC
- 60Hz
- 5.3A
- Provide Receptacle on GFCI Protected Circuit

Warranty

View Warranty Information

Notes


All information contained within this document subject to change without notice.


BERL'S COMMERCIAL SUPPLY BERLS.COM (800) 409-3131


Rough-in and line drawing

DRS125-FCT

Prior to roughing in, consult local, state, and federal codes for proper mounting height.

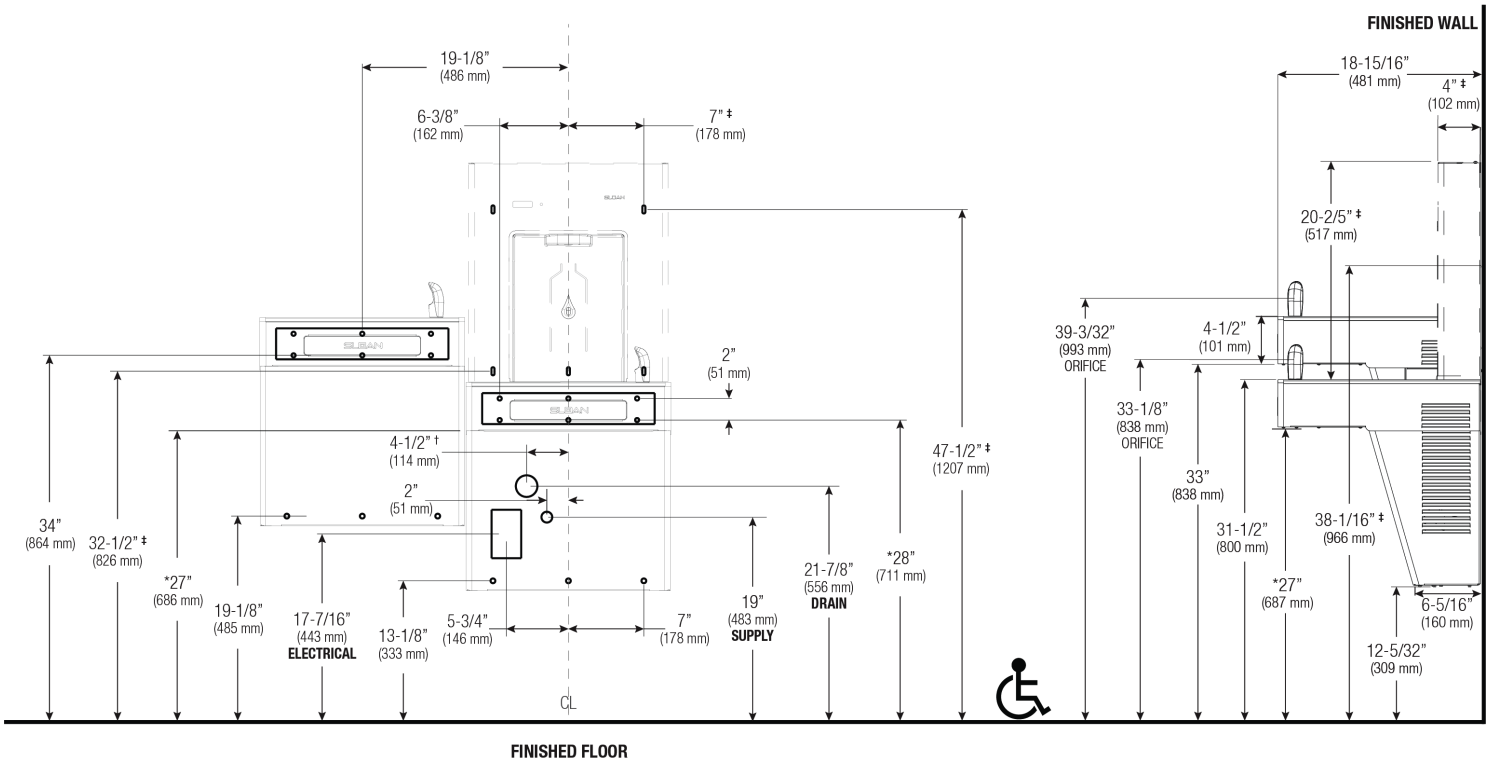

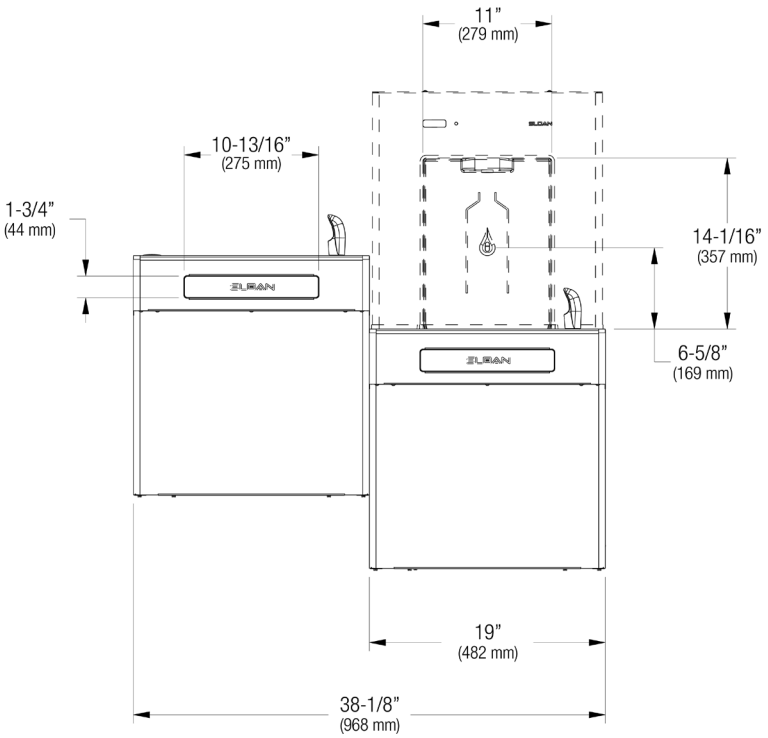

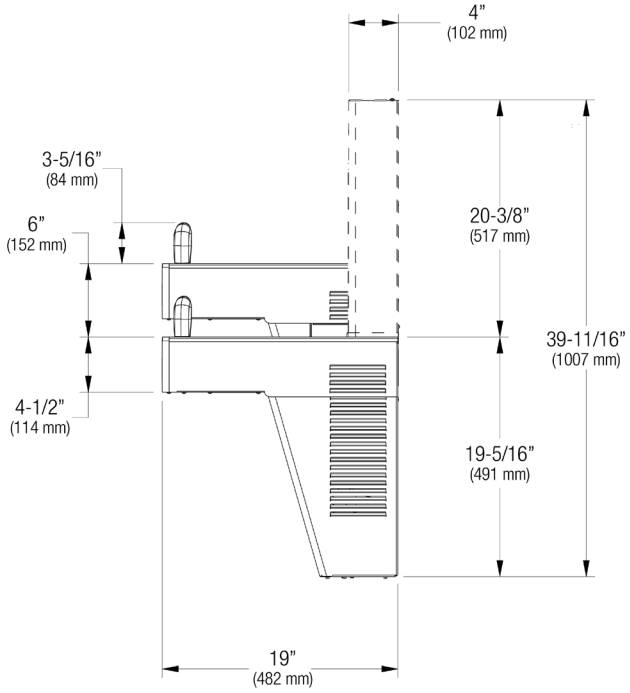

BERL'S COMMERCIAL SUPPLY BERLS.COM (800) 409-3131