



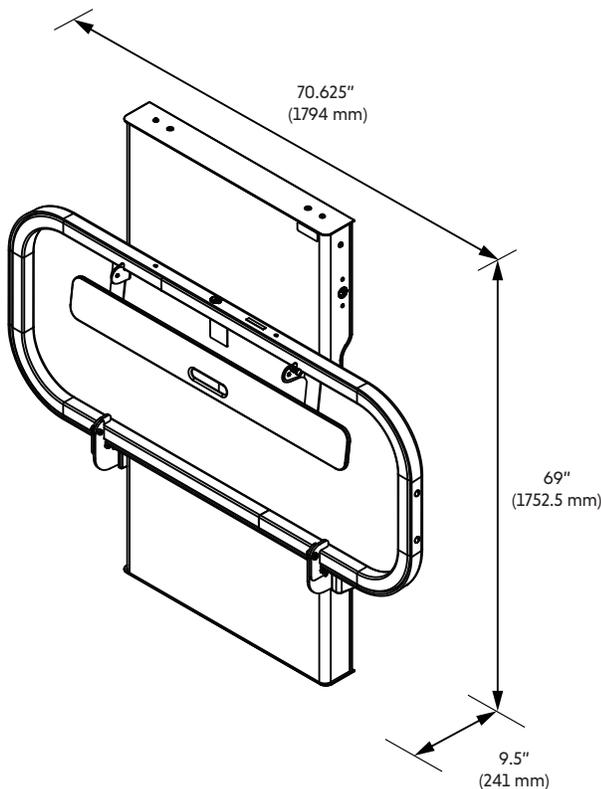

# Submittal Sheet

## Model 80HS0106 Ascent 70 Universal Changing Table

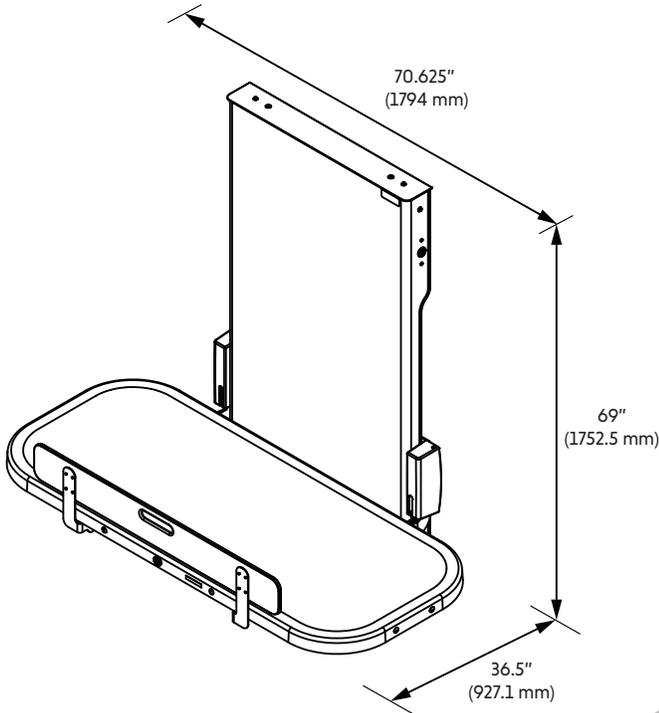

- Designed and engineered to meet the standards in the International Building Code (IBC)
- Automatic retracting feature stops operation and reverses direction when obstruction is detected.
- Unit needs to be plugged into a 120v 20A GFCI outlet. If a duplex outlet is being used the installer needs to ensure it is part of a GFCI protected circuit.
- Overall usable table surface size of 70.625" x 30.625".
- Two control button locations (on tray and side of shroud) for tray height adjustability (16" – 39" range).
- Battery backup provides safe use in power outage.
- Limited Warranty: This product is warranted against manufacturing defects for a period of 5 years.

### Short Specifications

1. Acceptable product: The Sova Company; Model 80HS0106 (Ascent 70 Universal Changing Table)
2. Characteristics:
  - a. 304 Brushed stainless steel shroud
  - b. Vacuum formed ABS changing surface
  - c. Powder coated steel frame
  - d. Direct actuator
  - e. Hinged tray guard
3. Load rating of up to 500lbs (226 kg)
4. Class 1 Electrical system to protect against electrical shock
5. Complies with UL 962 certification & CSA22.2 No. 68
6. Unit is IPX6 rated
7. IK10 Impact Rating

### Installation Information

- Reference Pre-Installation Guide and Assembly Instructions for more detailed information, including recommended blocking.
- Closed unit projects from wall 9.5 inches (241 mm).
- Open changing surface projects 36.5 inches (927.1 mm)
- Unit needs to be plugged into a 120v 20A GFCI outlet. To maintain a water ingress rating, ensure an appropriate While-in-use cover is installed.