


Sanitary Napkin Disposal – Surface Mounted

Feminine Hygiene Vendors and Disposals

MasterFormat Section 10 28 13

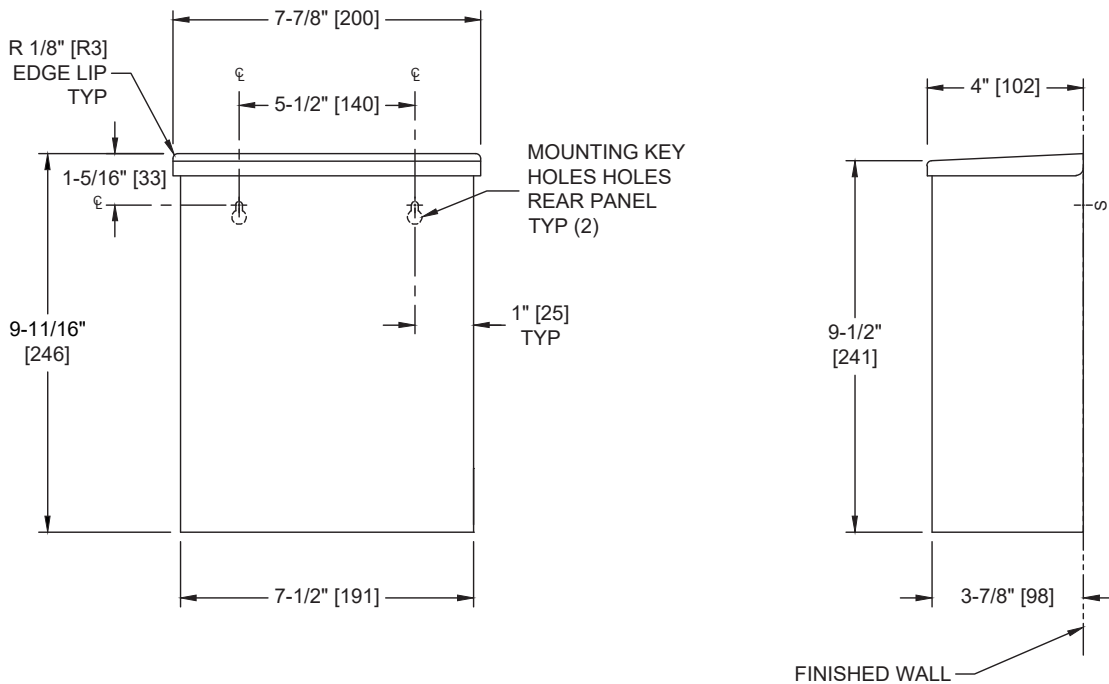

Scan for Information



SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)
MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:
ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS
FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Unit equipped with top cover door and cabinet. Waste capacity of 1.2 gal (4.5L). User lifts lid to deposit waste material. Door, flanges, waste receptacle and cabinet shall be 22 gauge type 304 stainless steel alloy 18-8. Shall have top cover door and cabinet of 22 gage type 304 stainless steel alloy 18-8.

KEY FEATURES & SPECIFICATIONS

- Type 304 Stainless Steel - Satin Finish
- Surface Mounted
- 1.2 gal (4.5 L) of dry/solids Waste Capacity



Model #0852
Technical Data Sheet

OPERATION & MAINTENANCE

User lifts lid to deposit waste material. Maintenance schedule determines trash removal cycle. Unit is emptied by opening top door and removing wax paper collection bag. Waxed paper liner bags are furnished by others.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	7 -7/8" [200] W x 4" [102] D x 9-11/16" [246] H
Construction	Type 304 Stainless Steel - Satin Finish
Mounting	Surface Mounted
Capacity	1.2 gal (4.5 L) of dry/solids Waste Capacity

INSTALLATION

Surface mount unit on wall or partition using #10 self-threading screws (by others). Two (2) mounting holes through back are keyhole slots for ease in hanging unit on pre-installed screws. For compliance with 2010 ADA Accessibility Standards, install unit so that top cover is 44" [1118] maximum above finished floor.

WARRANTY

One (1) Year from date of Invoice