




# RECESSED MINI-TOWEL DISPENSER AND WASTE RECEPTACLE COMBINATION

# TW-3

TW-3FS with 4" (102mm) skirt for surface-mounting

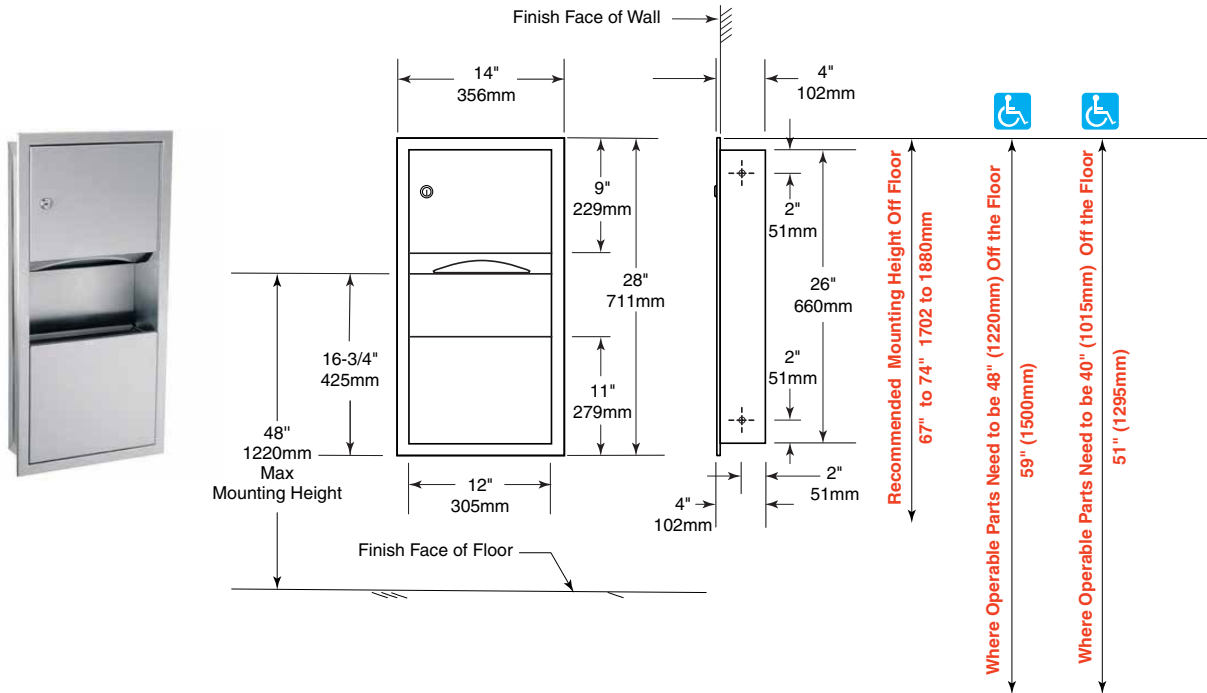

**Rough Wall Opening**  
 12-1/2" (318mm) wide  
 26-1/2" (673mm) high  
 4" (102mm) minimum recessed depth

**CONSTRUCTION:**

Fabricated of 22-gauge (0.8mm), and 24-gauge (0.6mm) Type 304 stainless steel. All welded construction with all exposed surfaces having a #4 satin finish. One piece seamless flange provided with 1/4" (6mm) return for rigidity. Door mounted to cabinet with continuous stainless steel piano-hinge and fitted with tumbler lock. Waste receptacle is removable for servicing.

**CAPACITY:**

350 C-fold or 475 multi-fold towels.

**INSTALLATION:**

Mount unit on wall with sheet-metal screws (not furnished) at points indicated. For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide toggle bolts or expansion bolts. If unit projects above top of wainscot, provide aluminum channel or other filler to eliminate gap between unit and finish face of wall.

**OVERALL DIMENSIONS:**

14" W x 28" H x 4" D (356 x 711 x 102mm)

**ADA GUIDE:**

Access to paper towels should be 15" to 48" (381 to 1219mm) above the finish floor to allow forward and side reach by people in wheelchairs.

**Recessed Mini-Towel Dispenser and Waste Receptacle Combination shall be Model TW-3 of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910**