SLOAN.

OPTIMA® SENSOR FAUCET
EAF-200-PLG-SF-0.5GPM-AER-IQ-FCT

CODE NUMBER

33351335

DESCRIPTION

Bluetooth Adapter, Plug Adapter Power Supply, Mixer Not Included, Brushed Stainless Finish, 0.5 gpm, Aerated Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet.

DETAILS

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Aerated (AER)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Mixer Not Included
- Finish: Brushed Stainless (SF)
- Factory Default Timeout: 30 seconds
- Factory Default Gallons per Cycle: 0.25

FEATURES

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Cast Brass Hand Washing Faucet with the following features:

- Double Infrared Sensors with Automatic Setting Feature and Microprocessor
- Automatic Self-adapting Sensor Technology
- Magnetic Solenoid Valve
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- 6 Volt DC Plug-in Adapter (must be ordered separately for Less Adapter/Transformer (-LT) faucets)
- Appropriate Mounting Hardware included
- IQ-Click feature permits activation of continuous run and temporary off modes
- Daisy Chain Electrical Splitter Cable included with Less transformer (-LT) faucets
- Includes EAF44 Power Splitter

ELECTRICAL SPECIFICATIONS

- Sensor Range: 4"–5" (102–127mm)
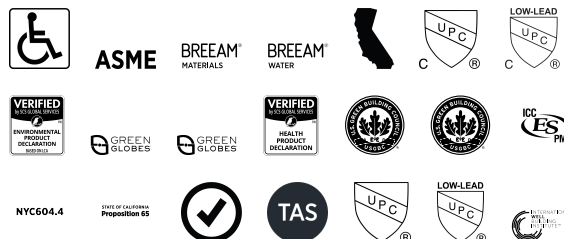- Timeout Adjustment Settings: 30s

VIDEOS

▶ Sloan Connect App®

DOWNLOADS

- EAF 200/225/250/275 Installation Instructions
- EAF 200/225/250/275 (SP) Installation Instructions
- Faucet Spray Heads Repair and Maintenance Guide
- Optima Plus EAF 200 Repair and Maintenance Guide
- Trim Plate Guide
- Additional Downloads
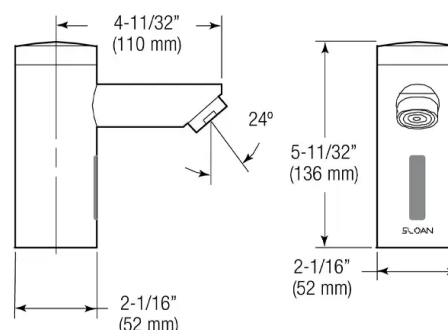
COMPLIANCES & CERTIFICATIONS

(ADA Compliant, ASME A112.18.1 Compliant, BREEAM Materials Credit, BREEAM Water Credit, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, EPD, Green Globes Materials & Resources Credit, Green Globes Water Credit, HPD, LEED Materials & Resources EPD Credit, LEED Materials & Resources HPD Credit, NSF-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UPC Certified, UPC Low Lead Compliant, WELL Building Standard)

NOTES

All information contained within this document subject to change without notice.

Looking for other variations of the EAF-200 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet.
Find a compatible sink for this faucet.

WARRANTY

View Warranty Information

Code 33351335 • Downloaded 03/20/25 • Revised 02/02/25 • View Latest Version

ROUGH-IN

EAF-200
Faucets with Single Line Water Supply

SPOUT

O-RING

GASKET

RETAINER

NUT

TEMPERED SUPPLY

1-3/16" (30 mm) MIN. DIA. HOLE REQUIRED

1-1/2" (38 mm) MAX. DECK THICKNESS

13" (330 mm) LONG FLEX HOSE

If a connection to separate hot and cold water supplies is desired, then a Bak-Chek® tee fitting (not supplied) must be used prior to connecting to the faucet.
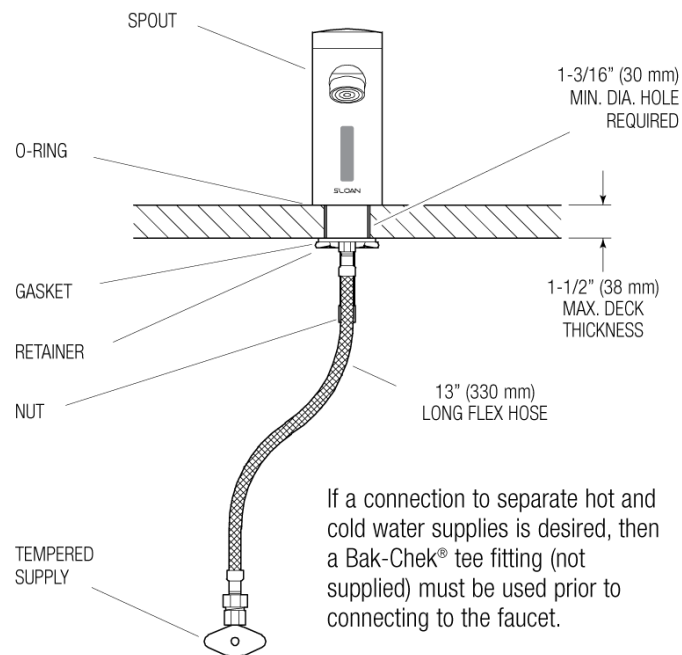
EAF-200-ISM, EAF-200-ISM-IC AND EAF-200-ISM-DPU-IC
Faucets with Hot and Cold Water Supply

SPOUT

O-RING

GASKET

RETAINER

NUT

HOT SUPPLY

MIXING LEVER (Can Be Set and Removed)

1-3/16" (30 mm) MIN. DIA. HOLE REQUIRED

1-1/2" (38 mm) MAX. DECK THICKNESS

13" (330 mm) LONG FLEX HOSES

COLD SUPPLY
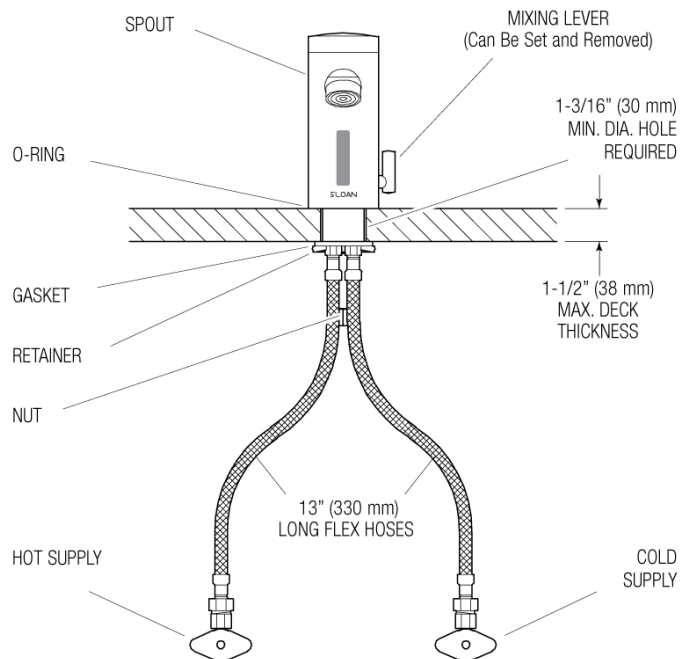
Sloan 10500 Seymour Ave, Franklin Park, IL 60131
Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com