BERL'S COMMERCIAL BERLS.COM (800) 409-3131



## SLOAN® SENSOR FAUCET

# SF-2250-4-BAT-BDM-CP-1.0GPM-LAM-FCT

(General Model Name: SF2250-4-BDM CP FCT G'NECK 4" BAT 1.0GPM)

#### **CODE NUMBER**

3362151

#### **DESCRIPTION**

4" Trim Plate, Battery Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 1.0 gpm, Laminar Spray, Infrared Sensor, Sloan® Battery-Powered Deck-Mounted Gooseneck Body Faucet.

#### **DETAILS**

• Flow Rate: 1.0 gpm (3.8 Lpm) (1.0GPM)

Spray Type: Laminar (LAM)
Sensor Type: Infrared
Mounting Type: Single Hole
Trim Plate: 4" (102mm) (4)
Power Supply: Battery (BAT)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

Finish: Polished Chrome (CP)Factory Default Timeout: 30 seconds

• Factory Default Gallons per Cycle: 0.5

#### **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

• Adjustable Infrared Sensor Range

• 36" (914 mm) Long Sensor Cable

• 24" (610 mm) Long Flex Hose

• Filtered Solenoid Valve with serviceable Strainer Filter

• Includes Four (4) AA-size Batteries

• Includes appropriate Mounting Hardware

## **ELECTRICAL SPECIFICATIONS**

• Battery Life: 2 years 8,000 cycles/month

• Timeout Adjustment Settings: 30s

#### **VIDEOS**

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown


SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450
Module Replacement

SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450
Battery Replacement- Sensor Range Adjustment

## **DOWNLOADS**

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- Trim Plate Guide
- SF-2100/2150 and SF-2200/SF-2250 Repair and Maintenance Guide
- Additional Downloads





## **COMPLIANCES & CERTIFICATIONS**



ASME



















(ADA Compliant, ASME A112.18.1 Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, IAPMO, NSF-61, Proposition 65, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

#### **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2250 product? View the general spec sheet with all options.



BERLS.COM (800) 409-3131

SLOAN®

# SLOAN® SENSOR FAUCET

# SF-2250-4-BAT-BDM-CP-1.0GPM-LAM-FCT

(General Model Name: SF2250-4-BDM CP FCT G'NECK 4" BAT 1.0GPM)

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

# WARRANTY

View Warranty Information

BERLS.COM


(800) 409-3131

## **SLOAN® SENSOR FAUCET**



(General Model Name: SF2250-4-BDM CP FCT G'NECK 4" BAT 1.0GPM)

# ROUGH-IN

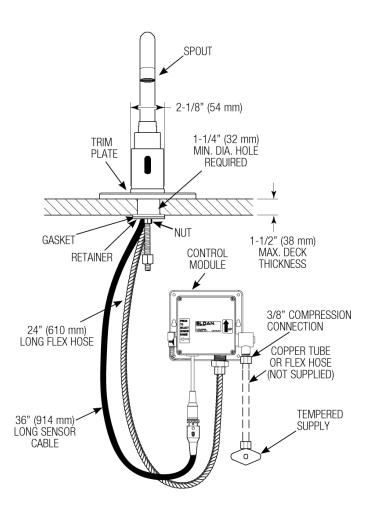

# HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

