**BERLS.COM** (800) 409-3131



#### **SLOAN® SENSOR FAUCET**

#### SF-2250-4-BAT-BDM-CP-0.35GPM-MLM-FCT

(General Model Name: SF2250-4 CP FCT G'NECK 4" BATT OPER. 0.35 GPM)

#### **CODE NUMBER**

3362180

#### **DESCRIPTION**

4" Trim Plate, Battery Power Supply, Below Deck Manual Mixing Valve, Polished Chrome Finish, 0.35 gpm, Multi-Laminar Spray, Infrared Sensor, Sloan® Battery-Powered Deck-Mounted Gooseneck Body Faucet.

#### **DETAILS**

• Flow Rate: 0.35 gpm (1.3 Lpm) (0.35GPM)

• Spray Type: Multi-Laminar (MLM)

 Sensor Type: Infrared • Mounting Type: Single Hole • Trim Plate: 4" (102mm) (4) • Power Supply: Battery (BAT)

• Temperature Mixer: Below Deck Manual Mixing Valve (BDM)

• Finish: Polished Chrome (CP) • Factory Default Timeout: 30 seconds

Factory Default Gallons per Cycle: 0.175

#### **FEATURES**

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Brass Gooseneck Hand Washing Faucet with the following features:

- Adjustable Infrared Sensor Range
- 36" (914 mm) Long Sensor Cable
- 24" (610 mm) Long Flex Hose
- Filtered Solenoid Valve with serviceable Strainer Filter
- Includes Four (4) AA-size Batteries
- Includes appropriate Mounting Hardware

#### **ELECTRICAL SPECIFICATIONS**

- Battery Life: 2 years 8,000 cycles/month
- Timeout Adjustment Settings: 30s


#### **VIDEOS**

- SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Parts Breakdown
- SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Module Replacement
- SF-2100/2150/SF-2200/2250/SF-2300/2350/SF-2400/2450 Battery Replacement- Sensor Range Adjustment

#### **DOWNLOADS**

- SF Series Installation Instructions
- SF Series (FR) Installation Instructions
- SF Series (SP) Installation Instructions
- SFP 35-A Installation Instructions
- Trim Plate Guide
- SF-2100/2150 and SF-2200/SF-2250 Repair and Maintenance Guide
- Additional Downloads





#### **COMPLIANCES & CERTIFICATIONS**



**ASME** 





























(ADA Compliant, ASME A112.18.1 Compliant, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Low Lead Compliant, Green Globes Water Credit, IAPMO, LEED V4 Water Efficiency Credit, NSF-61, NYC604.4, Proposition 65, Satisfies LEED Credits, TAS, UPC Certified, UPC Low Lead Compliant, WaterSense Listed, WELL Building Standard)

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



BERLS.COM (800) 409-3131

### **SLOAN® SENSOR FAUCET**

# SF-2250-4-BAT-BDM-CP-0.35GPM-MLM-FCT

(General Model Name: SF2250-4 CP FCT G'NECK 4" BATT OPER. 0.35 GPM)

#### **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the SF-2250 product? View the general spec sheet with all options.

Find a matching soap dispenser for this faucet. Find a compatible sink for this faucet.

#### **WARRANTY**

View Warranty Information

BERLS.COM


(800) 409-3131

**SLOAN® SENSOR FAUCET** 

## SF-2250-4-BAT-BDM-CP-0.35GPM-MLM-FCT

(General Model Name: SF2250-4 CP FCT G'NECK 4" BATT OPER. 0.35 GPM)

# ROUGH-IN

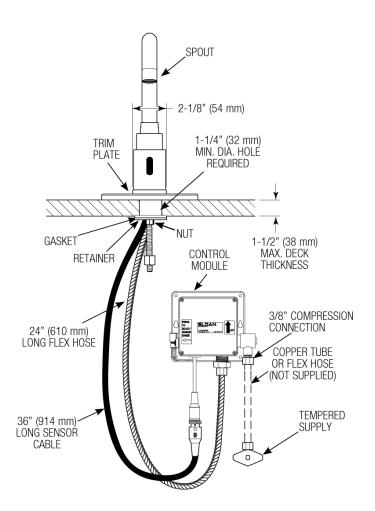

# HOT AND COLD WATER SUPPLY APPLICATIONS

(SPECIFY IN MODEL VARIATION)

