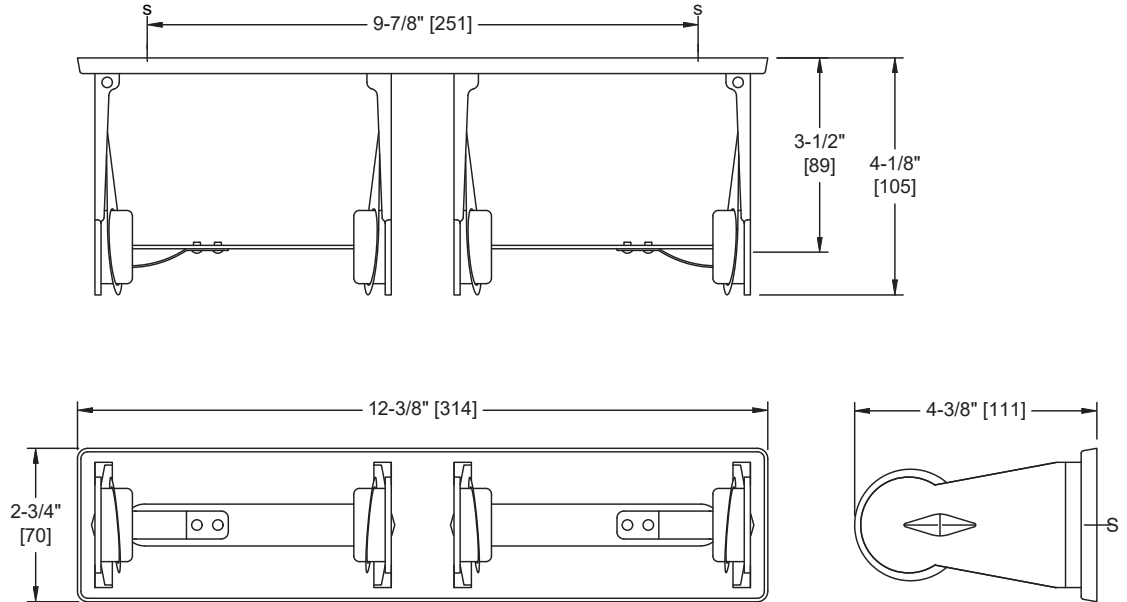



**American Specialties, Inc.****Model #0715****Technical Data Sheet****Toilet Tissue Holder (Double) – Chrome Plated – Surface Mounted***Toilet Tissue Dispensers**MasterFormat Section 10 28 13*Scan for
Information**SUSTAINABILITY/LEED**

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:ALL DIM'S INCH [MM]
ILLUSTRATION FOR REF ONLY AND NTS**PRODUCT OVERVIEW**

Holds two (2) rolls of standard core size toilet tissue up to 6" diameter [Ø152] and 4-1/8" [105] to 4-3/4" [121] wide. Unit fabricated of polished chrome-plated steel. Brake springs provide controlled delivery for each roll of toilet paper. Roll core prevents access to release catch spring and roll shall be non-removable until roll is depleted. Toilet paper is dispensed with controlled delivery from each roll. Roll is replaced on a cycle determined by maintenance needs. Roll cores prevent access to release catches and must be removed to allow end support arms to swing away for service roll replacements.

KEY FEATURES & SPECIFICATIONS

- Double Roll Dispenser
- 18 Gauge Chrome Plated Steel with High Polish
- Surface Mounted

**American Specialties, Inc.****Model #0715****Technical Data Sheet****OPERATION & MAINTENANCE**

Toilet paper is dispensed with free delivery from each roll while preventing over-spin from fast-pull. Roll is replaced on a cycle determined by maintenance needs. Roll cores prevent access to release catches and must be removed to allow end support arms to swing away for service roll replacements.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	12-3/8" [314] W x 2-3/4" [70] H x 4-1/4" [108] D
Construction	18 Gauge Chrome Plated Steel with High Polish
Mounting	Surface Mounted
Capacity	Holds two (2) rolls of standard core roll toilet paper up to 6" Dia. [Ø152]

INSTALLATION

For general utility, mount unit 32" [813] AFF (Above Finished Floor) from center line of holder. Surface mount and secure holder to wall with two (2) #10 self threading screws (supplied by others) through mounting slots in back plate. For compliance with 2010 ADA Accessibility Standards and 2015 ABA Standards install unit so that center line of roll is 7" [178] min front of the water closet to 9" [229] max and outlet of roll is 15" [381] min AFF to 48" [1219] max AFF.

OPTIONS**WARRANTY**

One (1) Year from date of Invoice