




## SURFACE-MOUNTED SANITARY NAPKIN DISPOSAL

# ND-1

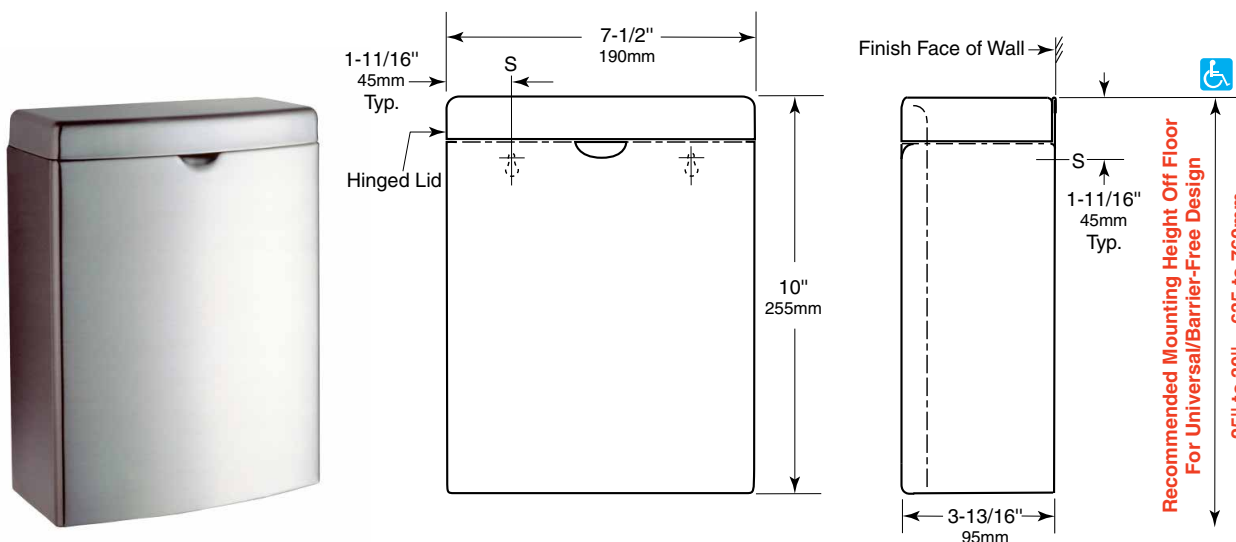

### MATERIALS:

**Container** — 18-8, type-304, 22-gauge (0.8mm) stainless steel. All-welded construction. Exposed surfaces have satin finish. Integral finger depression for opening cover.

**Cover** — 18-8, type-304, 22-gauge (0.8mm) stainless steel with satin finish. Drawn, one-piece, seamless construction. Secured to container with a full-length stainless steel piano-hinge.

Available in stainless steel only. For all other materials/finishes/colors see ND-1-\_\_\_.

### OPERATION:

Cover flips up for disposal of sanitary napkins and for servicing container.

### INSTALLATION:

For partitions with particle-board or other solid core, secure with two #8 x 3/4" (4.2 x 19mm) sheet-metal screws (not furnished) at all points indicated by an S, or provide through-bolts, nuts, and washers.

For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured. If two units are installed back-to-back, then provide threaded sleeves and machine screws for the full thickness of partition.

For masonry walls, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 3/16" (5mm) toggle bolts or expansion bolts.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws.

### SPECIFICATION:

Surface-mounted sanitary napkin disposal shall be type-304 stainless steel with all-welded construction; exposed surfaces shall have satin finish. Cover shall be drawn, one-piece, seamless construction and secured to container with a full-length stainless steel piano-hinge. Container shall have integral finger depression for opening cover.

**Surface-Mounted Sanitary Napkin Disposal shall be Model ND-1 of Gamco Commercial Restroom Accessories, One Gamco Place, Durant, OK, 74701-1910**