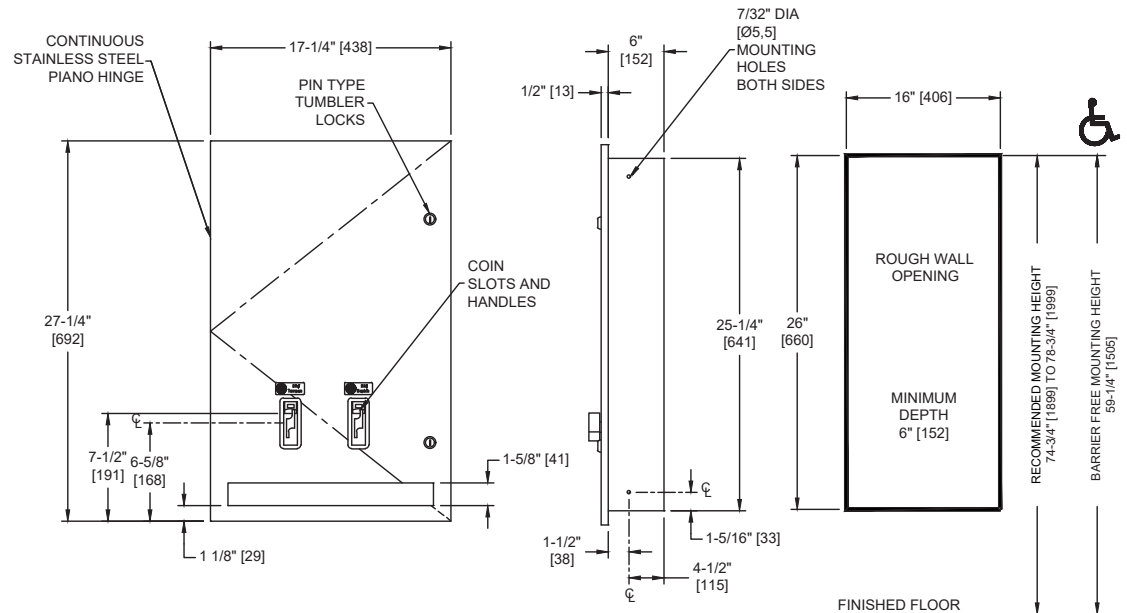



American Specialties, Inc.
Model #6468
Technical Data Sheet
Simplicity™ Collection Dual (30) Napkin / (27) Tampon Vendor – Recessed – 25¢ - 50¢ or Free Operation
Feminine Hygiene Vendors and Disposals
Simplicity
MasterFormat Section 10 28 13

 Scan for
Information

SUSTAINABILITY/LEED

MR 4.1 (1) MR 6 (1) EQ 4.2 (1)

MR 4.2 (1) EQ 4.1 (1) EQ 4.4 (1)

NOTE:

 ALL DIM'S INCH [MM]
 ILLUSTRATION FOR REF ONLY AND NTS
 FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN
 PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

PRODUCT OVERVIEW

Dispenses 30 feminine napkins and 27 tampons. Door has 2 tumbler locks. Inside coin box has a separately keyed lock. Universal coin mechanism allows for 25¢, 50¢ and free (no coin) operation. Choose appropriate suffix (-25, -50 or -F). Door shall be 18 gauge type 304 stainless steel alloy 18-8. Cabinet shall be 20 gauge same grade stainless steel. Door shall be attached with a multi-staked piano hinge and shall be held closed with two (2) tumbler locks keyed alike to other ASI washroom equipment.

KEY FEATURES & SPECIFICATIONS

- Seamless construction, crisp lines and minimalistic design
- Concealed multi-staked hinge - 3/16" diameter
- Type 304 Stainless Steel - Satin Finish
- Recessed
- Dual Vendor - 25¢ - 50¢ or Free Operation
- 30 Napkins AND 27 Tampons
- 6468-25 – allows for 25¢ operation
- 6468-50 – allows for 50¢ operation
- 6468-F – allows Free (no coin) operation


American Specialties, Inc.
Model #6468
Technical Data Sheet

OPERATION & MAINTENANCE

Deposit of specified coin allows operation of dispenser. Napkin and tampon dispensers operate independently. Selected product drops into vending opening after operator actuation. Indicator displays empty condition and blocks coin slot when product is depleted. Unit vend product supply is replenished on cycle determined by maintenance needs by opening door and manually reloading product into dispenser supply tracks. Locked compartment prevents unauthorized access. Track weights **MUST BE USED** to provide positive feed.

TECHNICAL INFORMATION / PRODUCT PROPERTIES

Property	Value
Dimensions	17-1/4" [438] x 27-1/4" [692] x 4-1/2" [114]
Construction	Type 304 Stainless Steel - Satin Finish Concealed multi-staked hinge - 3/16" diameter
Mounting	Recessed
Capacity	NAPKINS, SINGLES, CARDBOARD-BOXED, SEMIGLOSS FINISH CAPACITY 30 BOX SIZE 4-1/4" [108] x 3" [76] x 1-1/8" [29] ☐ Stayfree# 4 ☐ Guards# 247, or 147 ☐ Kotex# 704, 707, 07010, 07040, 07045, 07300, 07320 ☐ Pure-Nat# M-4 ☐ Modess# 4 TAMPONS, CYLINDER, CARDBOARD, SEMIGLOSS, CRIMPED ENDS CAPACITY 27 TUBE SIZE 3/4" diameter [Ø19] x 5-1/4" [134] ☐ Tampax ☐ Modess Tampons

INSTALLATION

Unit is mounted in wall recess using four (4) #10 self-threading screws (by others). For maximum usability and compliance with 2010 ADA Accessibility Standards, unit should be installed so that coin slot is between 54" [1372] maximum Above Finished Floor (AFF) and 38" [965] minimum AFF. Note that coin slot is 6-3/8" [162] above bottom edge of RWO, bottom flange is 5/8" [16] below bottom edge of RWO.

Rough Wall Opening (RWO) required is 16" [406] W x 26" [660] H x 6-1/4" [159] D minimum

WARRANTY

One (1) Year from date of Invoice