

### SPECIFICATIONS

#### PRODUCT SPECIFICATIONS

Halsey Taylor WaterSentry Plus Filter Kit (Bottle Fillers). Overall dimensions are 5-1/4" x 5-1/4" x 12-1/2".

<b>Dimensions:</b>	5-1/4" x 5-1/4" x 12-1/2"
<b>Shipping Weight:</b>	4 lbs.
<b>Flow Rate:</b>	1.5 GPM (5.6 L/m)
<b>Capacity:</b>	3000 gal. (11356 L)
<b>Temperature:</b>	40-100°F (4-38°C)
<b>Initial Pressure Drop:</b>	2-5 PSI (14-34 kPa)
<b>Maximum Pressure:</b>	105 PSI (724 kPa)
<b>Minimum Pressure:</b>	20 PSI (138 kPa)
<b>Water Inlet:</b>	3/8" (9.5mm) O.D. tube
<b>Water Outlet:</b>	1/4" (6.4mm) O.D. tube

**Special Note:** For use with HydroBoost Bottle Fillers - Order 55898C as replacement filter (available in multipacks).

- WaterSentry Plus Retrofit Filter Kit for unfiltered Halsey Taylor drinking solution products (Bottle Fillers).
- Filter should be replaced every 3,000 gallons or 1 year after installation.
- Equipped with quick-disconnect, 1/4 turn installation, as well as automatic inlet shut-off valve that closes when filter is removed.
- Designed to reduce lead, particles and chlorine. Also reduces odors and discoloration from incoming water.
- Spun Polypropylene prefilter mesh to prevent large, coarse sediment and particles from entering and clogging filter media.
- Filter is certified to NSF 42 and 53 for lead, particulate class 1, chlorine, taste and odor reduction.

#### KIT INCLUDES

- Filter
- Filter head
- Mounting bracket
- 1/4" polytubing
- 3/8" copper tube
- 1/4" quick connect union
- 1/4" quick connect stem elbow

PART: \_\_\_\_\_ QTY: \_\_\_\_\_

PROJECT: \_\_\_\_\_

CONTACT: \_\_\_\_\_

DATE: \_\_\_\_\_

NOTES: \_\_\_\_\_

APPROVAL: \_\_\_\_\_

NO IMAGE AVAILABLE

**Included with Product:** 3000 gal filter cartridge, kit components

AMERICAN PRIDE. A LIFETIME TRADITION. Like your family, the Elkay family has values and traditions that endure. For almost a century, Elkay has been a family-owned and operated company, providing thousands of jobs that support our families and communities.



**Product Compliance:** Buy American Act  
NSF 372 (lead free)  
NSF 42  
NSF 53



[Installation Instructions \(PDF\) - 98525C](#)

#### INSTALLATION INSTRUCTIONS

The filter must be installed in compliance with all state and local laws and regulations governing the installation and use of this product. Disconnect electrical power and close water supply valve before proceeding.

The filter must be installed in the cold water line. Flow indicator (arrow) on filter should point in the same direction as the water flow.

After installing new filter, open water supply valve and check for leaks. Reconnect electrical power supply. Flush system sufficiently (approximately 3 minutes) to effectively remove small residue of carbon fines.


NOTE: A water shutoff valve should be installed on the incoming water line to aid in future servicing of filter.

#### CAUTION

• Filter is designed to reduce lead from incoming water to levels below EPA requirements. Do not use with water that is microbiologically unsafe or with water of unknown quality without adequate disinfection before or after the system.

• Use on cold water line only. Do not allow installed filter to freeze. Do not attach hot water line to filter.

• Filter should be replaced every 3000 gallons (11,356 liters), or approximately 1 year after installation.

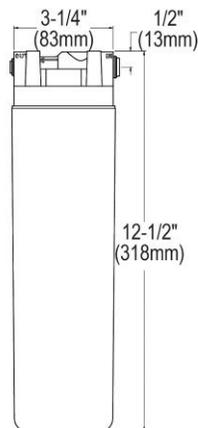

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkay.com](http://elkay.com) for the most current version of Elkay product specification sheets. This specification describes an Elkay product with design, quality, and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.